

本目录所示的图片及数据以实物为准，部分产品外观及性能优化改进不另行通知。
最终解释权归广东先朗照明所有。



ARCHITECTURE & LANDSCAPE

建筑·景观领域

2018



LED Luce Italia S.r.l.

info@ledluceitalia.it
www.ledluceitalia.it

广东先朗照明有限公司

电话：+86-20-86404887
传真：+86-20-86404879
公司网址：www.shonelightning.com.cn
地址：广东省广州市白云区江高镇鹤云路11号

GUANGDONG SHONE LIGHTING CO., LTD

Tel : +86-20-86404883
Fax : +86-20-86404886
Website : www.shonelightning.com
Add : 11 Heyun Road, Jianggao Town, Baiyun District, Guangzhou,
Guangdong, China 510450

为客户定制具体的专业照明应用方案

让 夜 晚 流 光 溢 彩
LIGHT UP THE COLORFUL NIGHT

SHONE®



23年—辉煌跨越
23 YEARS—EXCELLENT PROGRESS

SHONELIGHTING

未来，先朗照明将一如既往，秉承“客户第一”
In the future, as always, adhering to the “customer first”

SHONE

CONTENTS 目录

LUMINOUS BUILDING MATERIALS SERIES

发光建材系列

P13



石纹发光地砖
Shone LED Brick Light

P17



石纹发光墙砖
LED Wall Brick

P21



发光楼梯板
LED Stair Tile

LED OUTDOOR BRICK SERIES

LED户外发光砖系列

P27



LED 方形发光砖
LED Square Brick

P33



LED 条形发光砖
LED Rectangular Brick

LED OUTDOOR LINEAR LIGHT SERIES

LED户外线型灯系列

P39



LED 洗墙灯
LED Wall Washer

P43



LED 轮廓灯
LED Outline Light

LED INDOOR LINEAR LIGHT SERIES

LED室内线型灯系列

P49



LED 线型灯
LED Indoor Linear Light

LED OUTDOOR FLOODLIGHT SERIES

LED户外投光灯系列

P53



LED 投光灯
LED Outdoor Floodlight

PROFESSIONAL LIGHTING SERIES

专业照明系列

P55



LED 冷柜灯
Freezer Linear Light

P57



LED 广告灯条
Advertising Linear Light



About SHONE 关于先朗

广东先朗照明有限公司成立于1995年，坐落于广州市白云区江高镇国家级民营科技园区，毗邻广州白云国际机场，总建筑面积11000平方米。

自2008年始，先朗照明一直是中国国家高新技术企业，拥有各类专利50多项，所有产品均为原创，具有完全自主知识产权。

2003年，先朗研发生产了第一块LED发光砖，填补了行业LED发光砖市场空白，得到国内外众多知名灯光设计公司及设计师的高度认同，从此，先朗品牌发光砖在国内外市场上一直领先。

2017年，先朗研制出市场上第一块大理石纹发光砖，把光融入到建材，白天如同天然建材，夜晚建材能发光。现在各种纹理的发光建材，可广泛用于建筑幕墙、城市广场、园林路径、花坛泳池、户外家具、酒店会所、厨房卫浴等室内外建筑空间，开创了未来新型建材的一个应用新领域。

同时，先朗LED线条灯也以其独特的IP67结构防水设计及性能发挥，在国内许多标志性项目上使用，成为户外景观照明的一线品牌。

核心竞争力：依靠专业、稳定的研发及工程项目团队，专业的半自动流水线生产线，成熟可靠的生产工艺及材料配方，采用国际一线品牌的关键元部件，在保证出品品质优秀的前提下，能快速完成大批量或多品种的定制化产品订单。

核心价值观：诚信、负责、追求卓越，让用户满意、合作伙伴满意、先朗人满意，实现共赢。

Guangdong Shone Lighting Co., Ltd (Shone Lighting for short) was founded in 1995, adjacent to the Guangzhou Baiyun International Airport with convenient transportation.

Shone Lighting Industrial Park was established in 2001, located in the National Private Science Park of Jianggao Town, Baiyun District, Guangzhou, with a total area of 11,000 square meters.

Shone Lighting has been the national high-tech enterprise since 2008, with more than 50 patents. All the products of Shone Lighting are original and have complete own intellectual properties.

Shone Lighting manufactured the first LED brick in 2003, which filled the world's gaps in LED bricks and won the high degree of recognition from a lot of top lighting designers world-wide. Shone's LED brick has been a leading brand of the whole LED market since then. Additionally, Shone's LED linear light has also become the leading brand with the utilization by numerous domestic landmark projects because of its unique IP67 waterproofing structure and reliable & stable technology performance.


Core competitiveness: With professional and stable R & D and project team, professional semi-automatic flow production lines, mature and reliable production process and material formulation, adopting international top brands' key components, Shone Lighting can finish large quantities or more varieties of customized product orders rapidly in ensuring the high quality of products.

Core values: Being honest, responsible and pursuing of excellence so as to satisfy the customers, the business partners and every member in Shone, achieving win-win situation.



部分荣誉与专利 QUALIFICATION AND HONOR

用实力缔造属于我们的光荣，用努力见证那些值得骄傲的荣誉
With strength to create the glory belongs to ourselves, with efforts to witness the honor to be proud of

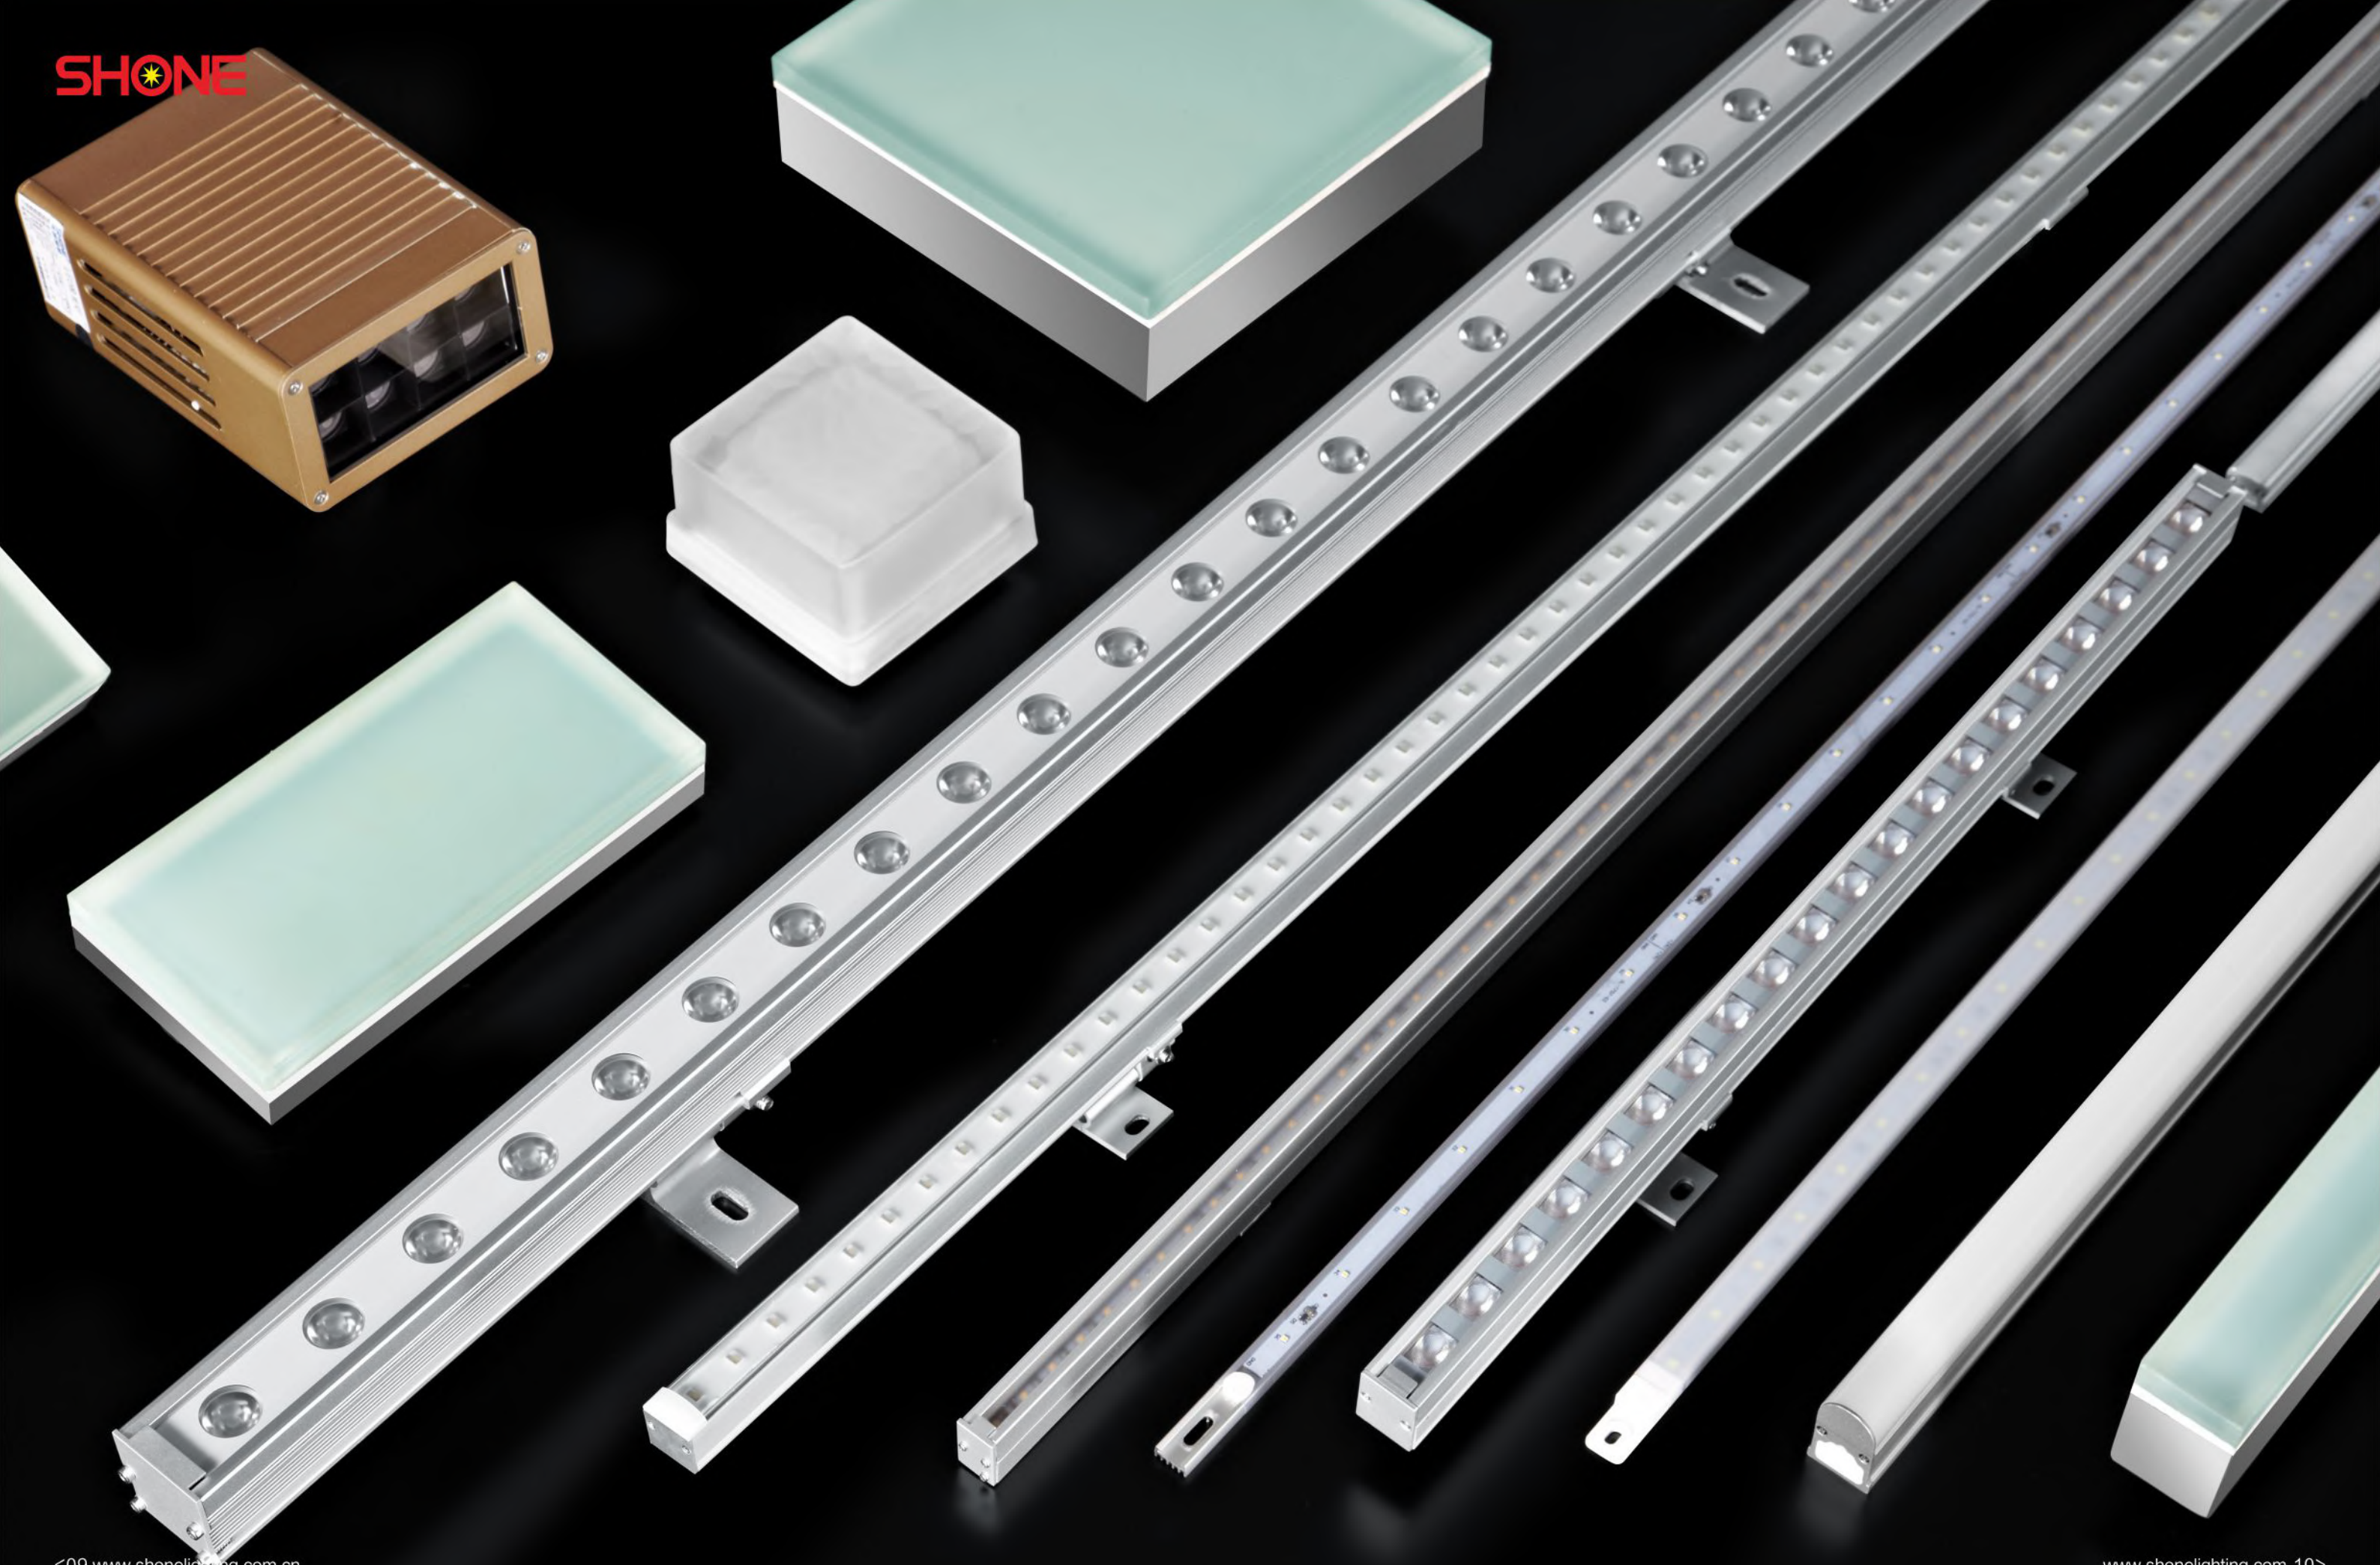



PROFESSIONAL LUMINOUS BUILDING MATERIALS SERIES

发光建材系列

石纹发光地砖 Shone LED Brick Light

石纹发光墙砖 LED Wall Brick

发光楼梯挡板 LED Stair Tile



产品特点:

- 完全定制化: 各种建材纹理, 尺寸、形状都能定制
- 耐候性强: 色彩稳定、耐刮耐磨、耐酸碱盐
- 无暗区: 基本实现无暗区连续性光带
- 智能延展, 人光互动
- 建材和灯具合二为一, 省心、省成本
- 节能, 易于安装

Features:

- Fully customized: Surface pattern, size and shape are customizable
- Excellent weatherability: Stable, abrasion-resistant, acid & alkali resistant surface pattern
- No shadow: Achieving the effect of continuous lighting band
- Interacting with people intelligently
- Building materials and light combined. Cost saving!
- Energy-saving & easy-installation

应用场所:

先朗发光建材系列的终极追求: 与建筑园林景观、地面地板、墙面、楼梯等环境高度融合, 凸显室内外建筑空间的美学价值与实用价值。

- 特别适用于厨卫、家具、墙面、地面, 以及建筑园林、景观亮化、商业地产、媒体建筑等室内外空间。
- 白天, 发光建材与天然建材浑然一体, 不影响建筑外观整体视觉。
- 夜晚, 发光建材会发光发亮, 装饰装点室内外建筑空间氛围。

Application:

The ultimate pursuit of SHONE' s Luminous Building Materials: highly blended with the environment, such as floor, wall, and stairs etc., highlighting the aesthetic value and practical value of the indoor and outdoor architectural space.


- Suitable for the kitchen, toilet, furniture, wall, floor, architecture, landscape, commercial real estate etc.
- By day, it can be highly blended with the whole architecture, without affecting the landscape visual effect.
- While by night, it turns into a luminous brick, coloring the architecture with its dynamic lighting effects.

SHONE LED BRICK LIGHT
石纹发光地砖

Model: SL BL46 G100*100mm W30



Common Size: 100*100*46mm
200*200*46mm
100*200*38mm
200*200*38mm


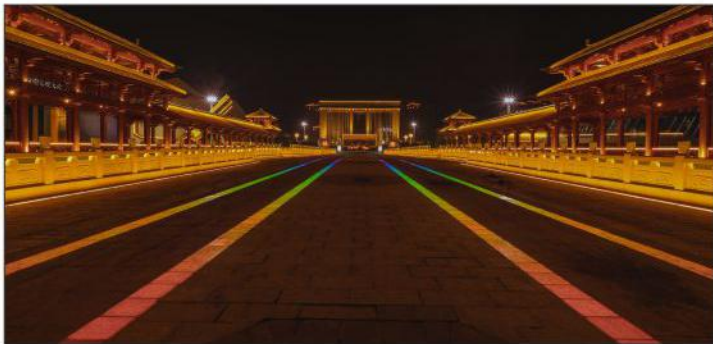


性能特点:

- 完全定制化 (尺寸, 形状以及石纹、木纹、砖纹等各种建材面都能定做, 而且纹理逼真细腻)
- 耐候性强 (颜色稳定, 耐刮耐磨, 耐酸碱)
- 无暗区 (基本实现无暗区连续光带)
- 节能, 易于安装

Features:

- Fully Customizable (Surface pattern, size and shape are customizable and surface pattern is lifelike, including stone pattern, wood pattern and other patterns)
- Strong Weatherability (Surface pattern is stable, abrasion-resistant, acid & alkali resistant)
- No Shadow (Achieving the effect of continuous lighting band)
- Energy-saving & easy-installation

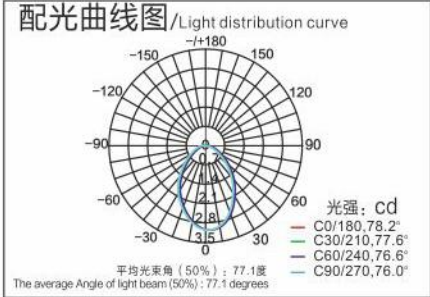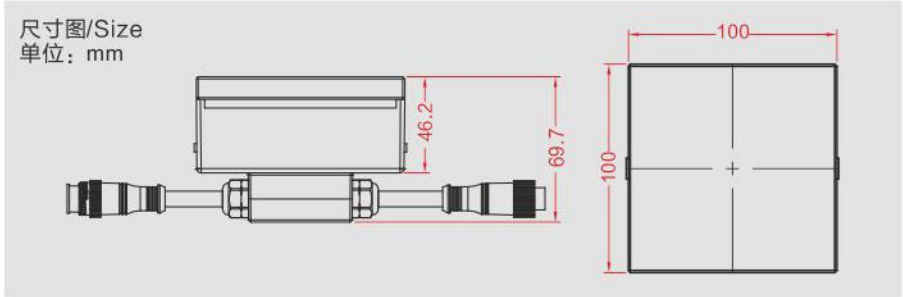

LED类型/LED Type	科锐 欧司朗 流明 日亚 等	Cree, Osram, Lumileds, Nichia etc.
系统功率/Power Rating	1.3W	1.3W
LED寿命/Life Span	≥5万小时	≥50000 hours
LED颜色/LED Color	冷白、中性白、暖白、RGB变色	White, R, G, B, RGB
光束角/Beam Angle	>100°	>100°
工作电压/Input Voltage	24VDC	24VDC
外壳材质/Material(Housing)	压铸铝	Die-cast aluminum
玻璃材质/Glass Material	钢化玻璃	Tempered Glass
环境温度范围/Working Temperature	-25℃ ~ +50℃	-25℃ ~ +50℃
规格尺寸(不含预埋盒)/Dimension(without installation box)	100x100x46mm	100x100x46mm
连接线/Cable Interconnect	电源线2x1.0mm² 橡胶线; 信号线4x0.3mm²橡胶线	Power cable:2x1.0mm² rubber cable; Signal cable:4x0.3mm² rubber cable
控制方式/Control	ON/OFF、DMX512	ON/OFF, DMX512
防护等级/Ingress Protection	IP67	IP67
光通量/Luminous Flux	白光36.4lm; RGB4lm	White36.4lm; RGB 4lm
辉度级别/Contrast Level	8 bit(DMX512)	8 bit(DMX512)
亮度级别/Brightness Level	256	256
电气安全等级/Classification	Ⅲ类	Ⅲ
LED驱动方式/LED Driver	恒压驱动、恒流驱动	Constant Current Driver, Constant Voltage Driver
工作环境/Working Environment	室内、室外	Indoor, Outdoor

EMERGENCY LED BRICK

指示地砖灯


Model: SL308.335.6150.6



- 性能特点:**
- 超强承重能力
 - Ip67
 - 内置2200mAh电池，断电之后可以继续照明超过4小时
 - 适合商场，写字楼，学校等公共场所

- Features:**
- Strong load-bearing capability
 - Ip67
 - With built-in 2200mAh battery,the power can last for 4 hours
 - Suitable for the public places like mall, office Building, school etc.

尺寸图/Size
单位: mm

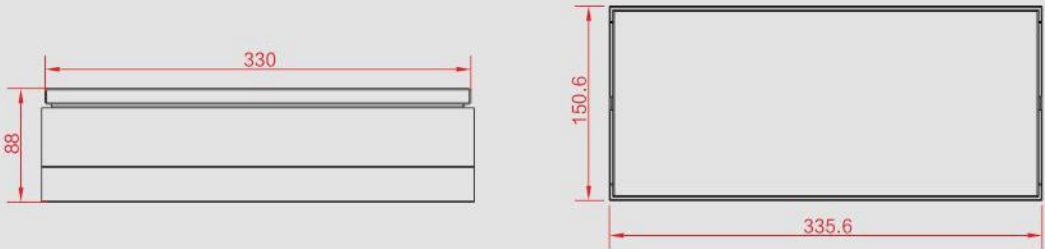

LED类型/LED Type	科锐 欧司朗 流明 日亚 等	Cree, Osram, Lumileds, Nichia etc.
系统功率/Power Rating	10W	10W
LED寿命/Life Span	≥5万小时	≥50000 hours
LED颜色/LED Color	绿色	Green
光束角/Beam Angle	>100°	>100°
工作电压/Input Voltage	100-240 VAC	100-240 VAC
外壳材质/Material(Housing)	不锈钢底壳	Stainless Steel
规格尺寸/Dimension	335.6X150.6X80mm	335.6X150.6X80mm
连接线/Cable Interconnect	电源线3x1mm ²	Power Cable: 3x1mm ² rubber cable
控制方式/Control	上电即亮	ON/OFF
防护等级/Ingress Protection	IP67	IP67
电气安全等级/Classification	I类	I
工作环境/Working Environment	室内、室外	Indoor, Outdoor

石纹发光墙砖

LED Wall Brick

Model: SL WL12 R240*60mm W30



Common Size: 1220*60*14/11mm
730*60*14/11mm
240*60*14/11mm



性能特点:

- 钢化玻璃结构
- 节能, 易于安装
- 适用于庭院、花园、媒体建筑
- DC24V供电, 安全

Features:

- Tempered glass structure
- Energy-saving & easy-installation
- Suitable for courtyard, garden and media architecture
- DC24V, safety

尺寸图/Size
单位: mm



LED类型/LED Type	科锐 欧司朗 流明 日亚 等			Cree, Osram, Lumileds, Nichia etc.		
系统功率/Power Rating	1.5W	1W	0.5W	1.5W	1W	0.5W
规格尺寸/Dimension	1220*60*14/11mm	730*60*14/11mm	240*60*14/11mm	1220*60*14/11mm	730*60*14/11mm	240*60*14/11mm
光通量/Luminous Flux	9lm	6lm	3lm	9lm	6lm	3lm
LED寿命/Life Span	≥5万小时			≥50000 hours		
LED颜色/LED Color	冷白、中性白、暖白			White		
光束角/Beam Angle	120°			120°		
工作电压/Input Voltage	24VDC			24VDC		
玻璃材质/Glass Material	钢化玻璃			Tempered Glass		
环境温度范围/Working Temperature	-25℃ ~ +50℃			-25℃ ~ +50℃		
连接线/Cable Interconnect	电源线/信号线2x0.3mm ² , 3x0.2mm ²			Power cable/Single cable: 2x0.3mm ² , 3x0.2mm ²		
控制方式/Control	ON/OFF、SPI			ON/OFF、SPI		
防护等级/Ingress Protection	IP65			IP65		
辉度级别/Luminous Efficacy	8 bit			8 bit		
亮度级别/Brightness Level	256			256		
电气安全等级/Classification	Ⅲ类			Ⅲ		
LED驱动方式/LED Driver	恒压驱动、恒流驱动			Constant Current Driver, Constant Voltage Driver		
工作环境/Working Environment	室内、室外			Indoor, Outdoor		

发光墙砖（鱼肚白）
LED Wall Tile (Calacatta)


Model: SL BL18 CA1200*600mm W30



Common Size: 100*200*16mm
200*300*16mm
1200*600*19mm
2000*1000*24mm



尺寸图/Size
单位: mm



- 性能特点:**

 - 自发光墙砖，表面纹理可定制
 - 钢化玻璃结构
 - 节能，易于安装
 - 适用于建筑幕墙、厨房卫浴、酒店会所等场所
- Features:**

 - Self-luminous wall tiles; Customizable surface pattern
 - Tempered glass structure
 - Energy-saving & easy-installation
 - Suitable for architecture curtain wall & interior -decorative wall etc.

LED类型/LED Type	科锐 欧司朗 流明 日亚 等		Cree, Osram, Lumileds, Nichia etc.	
系统功率/Power Rating	10W	17W	10W	17W
规格尺寸/Dimension	1200*600*19mm	1000*2000*24mm	1200*600*19mm	1000*2000*24mm
光通量/Luminous Flux	250lm	425lm	250lm	425lm
LED寿命/Life Span	≥5万小时		≥50000 hours	
LED颜色/LED Color	冷白、中性白、暖白		White	
光束角/Beam Angle	120°		120°	
工作电压/Input Voltage	24VDC		24VDC	
玻璃材质/Glass Material	钢化玻璃		Tempered Glass	
环境温度范围/Working Temperature	-25℃ ~ +50℃		-25℃ ~ +50℃	
连接线/Cable Interconnect	电源线/信号线2x0.3mm², 3x0.2mm²		Power cable/Single cable: 2x0.3mm², 3x0.2mm²	
控制方式/Control	ON/OFF、SPI		ON/OFF, SPI	
防护等级/Ingress Protection	IP65		IP65	
辉度级别/Luminous Efficacy	8 bit		8 bit	
亮度级别/Brightness Level	256		256	
电气安全等级/Classification	Ⅲ类		Ⅲ	
LED驱动方式/LED Driver	恒压驱动、恒流驱动		Constant Current Driver, Constant Voltage Driver	
工作环境/Working Environment	室内、室外		Indoor, Outdoor	

发光楼梯挡板（木纹）

LED Stair Tile

Model: SL SRT15 WO900*160mm W30



Common Size: 900*160*16mm
1100*160*16mm



性能特点:

- 楼梯板、楼梯灯合二为一，省钱省心
- 表面纹理可定制
- 节能，易于安装
- 适用于阁楼别墅、花园庭院、广场商铺等室内、室外的楼道台阶

Features:

- Stairs riser and stair light combined. Cost saving!
- Customizable surface pattern
- Energy-saving & easy-installation
- Suitable for Indoor and outdoor stairs, like Loft Villa, courtyard& garden, mall & square etc.

尺寸图/Size
单位: mm



LED类型/LED Type	科锐 欧司朗 流明 日亚 等		Cree, Osram, Lumileds, Nichia etc.	
规格尺寸/Dimension	900*160*16mm	1100*160*16mm	900*160*16mm	1100*160*16mm
系统功率/Power Rating	2.5W		2.5W	
LED寿命/Life Span	≥5万小时		≥50000 hours	
LED颜色/LED Color	冷白、中性白、暖白		White	
光束角/Beam Angle	120°		120°	
工作电压/Input Voltage	24VDC		24VDC	
玻璃颜色/Glass Color	青、红		Cyan, Red	
玻璃材质/Glass Material	钢化玻璃		Tempered Glass	
环境温度范围/Working Temperature	-25℃ ~ +50℃		-25℃ ~ +50℃	
连接线/Cable Interconnect	电源线/信号线2x0.3mm², 3x0.2mm²		Power cable/Single cable: 2x0.3mm², 3x0.2mm²	
控制方式/Control	ON/OFF、SPI		ON/OFF、SPI	
防护等级/Ingress Protection	IP65		IP65	
光通量/Luminous Flux	13lm		13lm	
辉度级别/Luminous Efficacy	8 bit		8 bit	
亮度级别/Brightness Level	256		256	
电气安全等级/Classification	Ⅲ类		Ⅲ	
LED驱动方式/LED Driver	恒压驱动、恒流驱动		Constant Current Driver, Constant Voltage Driver	
工作环境/Working Environment	室内、室外		Indoor, Outdoor	


SOLAR LED BRICK
LED室外 太阳能发光砖

Model: SL SBL47 Lotus100*100mm W30



- 性能特点:**
- 太阳能发光砖，安全环保
 - 免驱设计，易于安装维护
 - 表面图案可定制
 - 适合广场、景区、道路、庭院等阳光直射的地方

- Features:**
- Solar energy, safe and environmentally friendly
 - Free drive design, easy installation & maintenance
 - Customizable surface pattern
 - Suitable for places with direct sunlight, like square, landscape, garden etc.

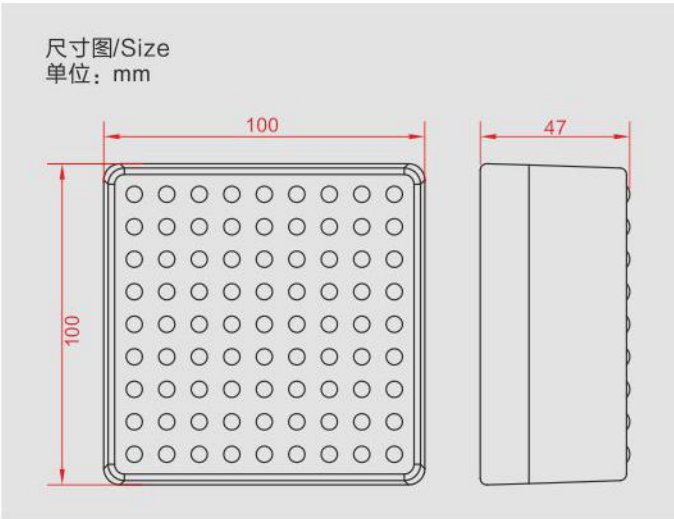

LED类型/LED Type	流明	Lumileds
系统功率/Power Rating	0.5W	0.5W
LED寿命/Life Span	≥5万小时	≥50000 hours
LED颜色/LED Color	3000K, 红, 绿, 蓝	3000K, R, G, B
电池规格/Battery	2200mAh	2200mAh
外壳材质/Material(Housing)	PC 透明罩	PC Transparent Cover
规格尺寸/Dimension	100x100x47mm	100x100x47mm
环境温度范围/Working temperature	-10℃ ~ +45℃	-10℃ ~ +45℃
控制方式/Control	ON/OFF	ON/OFF
防护等级/Ingress Protection	IP67	IP67
光通量/Luminous Flux	0.55lm	0.55lm
电池充电时间/Charging Period of Battery	24小时 (晴天)	24 hours (sunny days)
电池放电时间/Discharge Period of Battery	≥24小时	≥24 hours
电池循环性能/Battery Cycle life	≥500 次	≥500 Cycle
工作环境/Working Environment	室外	Outdoor

PROFESSIONAL LED OUTDOOR BRICK SERIES

LED户外 发光砖系列

LED 方形发光砖 LED Square Brick

LED 条形发光砖 LED Rectangular Brick



产品特点:

- 尺寸可定制
- 颜色可定制
- 适合于公园广场、街道景观照明。
- 压铸铝结构，采用耐酸碱盐密封胶，具有良好散热效果。
- 具备安装预埋件结构，安装调试更方便。
- 高光效LED，适应不同的亮度要求，多种颜色可供选择。
- 专用防腐线材。
- 防护等级最高可达IP67。

Features:

- Size Customizable
- Color Customizable
- Suitable for park square, street landscape lighting.
- Aluminum die-casting structure, the use of acid salt sealant, with good cooling effect.
- Installation of embedded parts structure, installation and commissioning more convenient.
- High light efficiency LED, to adapt to different brightness requirements, a variety of colors to choose from.
- Dedicated anticorrosion wire.
- Protection class IP67.

应用场所:

- 适用于城市广场、商业酒店、园林景观夜景设计，可根据设计师的要求，配制出某些与建筑视觉颜色接近的发光砖面。白天，发光砖能与整个建筑融为一体；晚上，发光砖透出柔和梦幻的光彩，吸引游人体验人、光互动，享受园林路径、广场美妙的夜景。


Application:

- Shone LED bricks are suitable for city square, commercial hotel, landscape night view design. The color of the glass on the brick can be customized according to designers' requirement.
- During the day time, the LED bricks can be blended with the building perfectly.
- At night, the soft and dreamlike light from the LED bricks attracts visitors to stay and play, and enjoy the beautiful night view relaxed.


LED 方形发光砖
LED Square Brick
Model: SL308.100100



尺寸图/Size
单位: mm

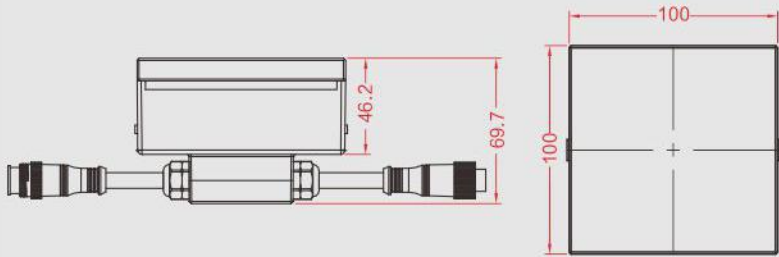

配光曲线图/Light distribution curve

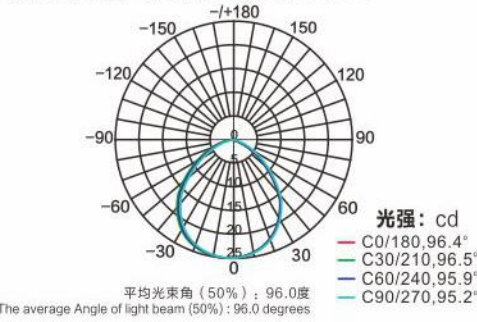

LED类型/LED Type	科锐 欧司朗 流明 日亚 等	Cree, Osram, Lumileds, Nichia etc.
系统功率/Power Rating	1.3W	1.3W
LED寿命/Life Span	≥5万小时	≥50000 hours
LED颜色/LED Color	冷白、中性白、暖白、RGB变色	White, R, G, B, RGB
光束角/Beam Angel	>100°	>100°
工作电压/Input Voltage	24VDC	24VDC
外壳材质/Material(Housing)	压铸铝	Diecast Aluminum
玻璃材质/Glass Material	钢化玻璃	Tempered Glass
环境温度范围/Working Temperature	-25℃ ~ +50℃	-25℃ ~ +50℃
规格尺寸(不含预埋盒)/Dimension(without installation box)	100x100x46mm	100x100x46mm
连接线/Cable Interconnect	电源线 2x1.0mm² 橡胶线; 信号线 4x0.3mm² 橡胶线	Power cable: 2x1.0mm² rubber cable; Signal cable: 4x0.3mm² rubber cable
控制方式/Control	ON/OFF、DMX512	ON/OFF, DMX512
防护等级/Ingress Protection	IP67	IP67
光通量/Luminous Flux	36.4lm	36.4lm
辉度级别/Contrast Level	8 bit(DMX512)	8 bit(DMX512)
亮度级别/Brightness Level	256	256
电气安全等级/Classification	Ⅲ类	Ⅲ
LED驱动方式/LED Driver	恒压驱动、恒流驱动	Constant Current Driver, Constant Voltage Driver
工作环境/Working Environment	室内、室外	Outdoor, Indoor

LED 方形发光砖
LED Square Brick


Model: SL308.200200




Available Specification: SL308.300300 / SL308.12001200



尺寸图/Size
单位: mm

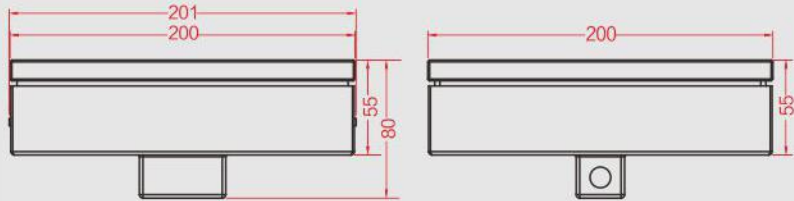


配光曲线图/Light distribution curve

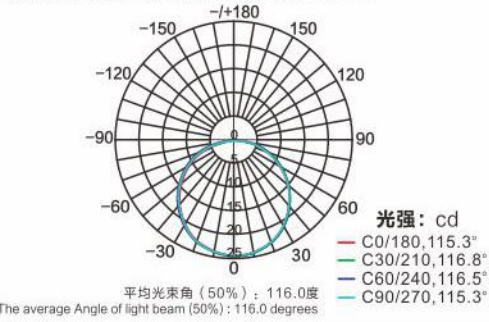


LED类型/LED Type	科锐 欧司朗 流明 日亚 等	Cree, Osram, Lumileds, Nichia etc.
系统功率/Power Rating	2.6W	2.6W
LED寿命/Life Span	≥5万小时	≥50000 hours
LED颜色/LED Color	冷白、中性白、暖白、RGB变色	White, R, G, B, RGB
光束角/Beam Angel	>100°	>100°
工作电压/Input Voltage	24VDC	24VDC
外壳材质/Material(Housing)	不锈钢	Stainless Steel
玻璃材质/Glass Material	钢化玻璃	Tempered Glass
环境温度范围/Working Temperature	-25℃ ~ +50℃	-25℃ ~ +50℃
规格尺寸(不含预埋盒)/Dimension(without installation box)	200x200x55mm	200x200x55mm
连接线/Cable Interconnect	电源线2x1.0mm² 橡胶线; 信号线4x0.3mm² 橡胶线	Power cable: 2x1.0mm² rubber cable; Signal cable: 4x0.3mm² rubber cable
控制方式/Control	ON/OFF、DMX512	ON/OFF, DMX512
防护等级/Ingress Protection	IP67	IP67
光通量/Luminous Flux	72.8lm	72.8lm
辉度级别/Contrast Level	8 bit(DMX512)	8 bit(DMX512)
亮度级别/Brightness Level	256	256
电气安全等级/Classification	Ⅲ类	Ⅲ
LED驱动方式/LED Driver	恒压驱动、恒流驱动	Constant Current Driver, Constant Voltage Driver
工作环境/Working Environment	室内、室外	Outdoor, Indoor


LED 方形发光砖
LED Square Brick
Model: SL308.100100H

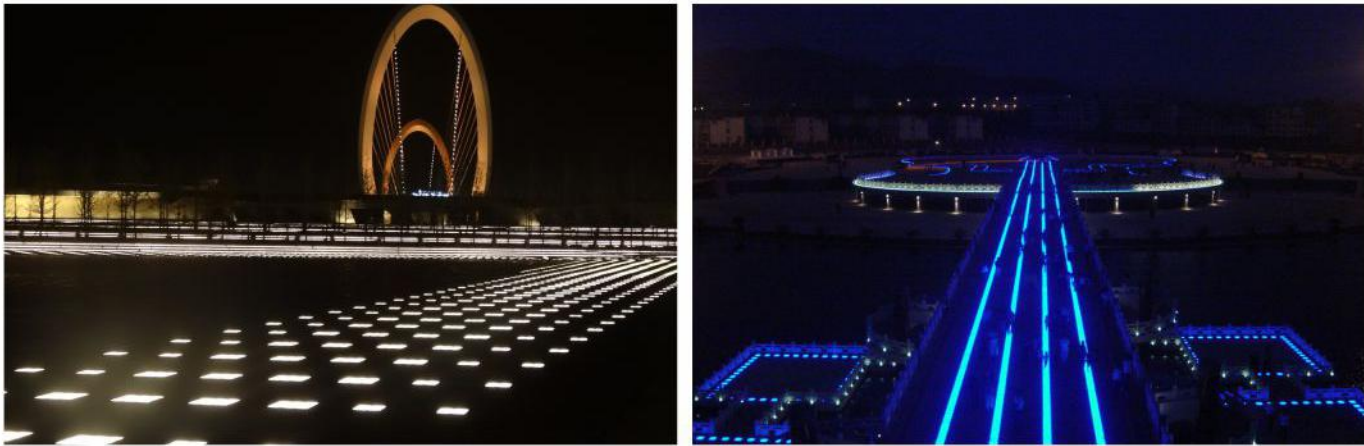

尺寸图/Size
单位: mm

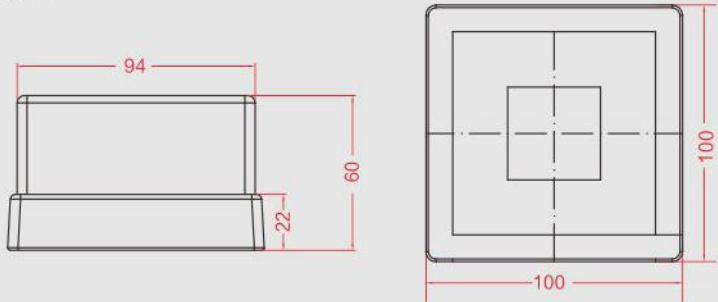

配光曲线图/Light distribution curve

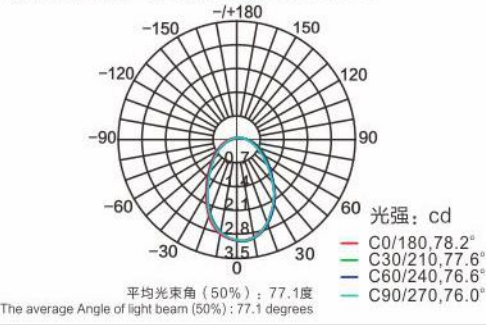



LED类型/LED Type	科锐 欧司朗 流明 日亚 等	Cree, Osram, Lumileds, Nichia etc.
系统功率/Power Rating	1.3W	1.3W
LED寿命/Life Span	≥5万小时	≥50000 hours
LED颜色/LED Color	冷白、中性白、暖白、RGB变色	White, R, G, B, RGB
光束角/Beam Angel	>100°	>100°
工作电压/Input Voltage	24VDC	24VDC
外壳材质/Material(Housing)	钢化玻璃	Tempered Glass
玻璃材质/Glass Material	钢化玻璃	Tempered Glass
环境温度范围/Working Temperature	-25℃ ~ +50℃	-25℃ ~ +50℃
规格尺寸(不含预埋盒)/Dimension(without installation box)	100x100x60mm	100x100x60mm
连接线/Cable Interconnect	电源线2x1.0mm² 橡胶线; 信号线4x0.3mm² 橡胶线	Power cable: 2x1.0mm² rubber cable; Signal cable: 4x0.3mm² rubber cable
控制方式/Control	ON/OFF、DMX512	ON/OFF, DMX512
防护等级/Ingress Protection	IP67	IP67
光通量/Luminous Flux	36.4lm	36.4lm
辉度级别/Contrast Level	8 bit(DMX512)	8 bit(DMX512)
亮度级别/Brightness Level	256	256
电气安全等级/Classification	Ⅲ类	Ⅲ
LED驱动方式/LED Driver	恒压驱动、恒流驱动	Constant Current Driver, Constant Voltage Driver
工作环境/Working Environment	室内、室外	Outdoor, Indoor

LED 条形发光砖
LED Rectangular Brick

Model: SL308.100200



Available Specification: SL308.1201000 / SL308.2001000

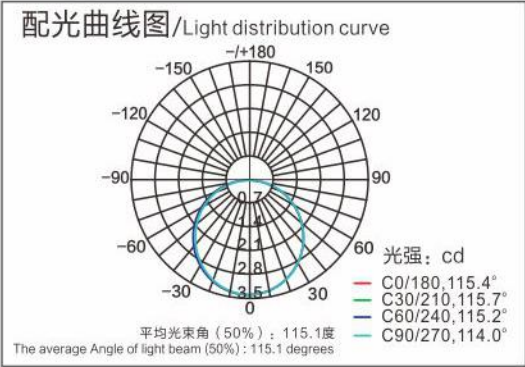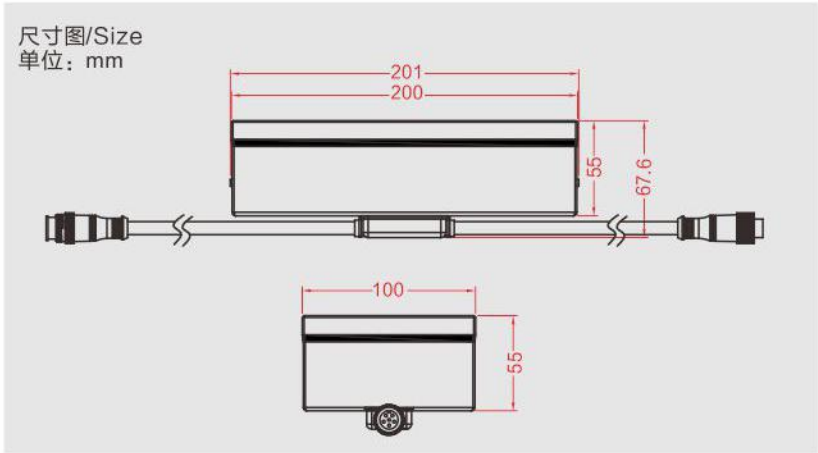

LED类型/LED Type	科锐 欧司朗 流明 日亚 等	Cree, Osram, Lumileds, Nichia etc.
系统功率/Power Rating	2.6W	2.6W
LED寿命/Life Span	≥5万小时	≥50000 hours
LED颜色/LED Color	冷白、中性白、暖白、RGB变色	White, R, G, B, RGB
光束角/Beam Angel	>100°	>100°
工作电压/Input Voltage	24VDC	24VDC
外壳材质/Material(Housing)	不锈钢	Stainless Steel
玻璃材质/Glass Material	钢化玻璃	Tempered Glass
环境温度范围/Working Temperature	-25℃ ~ +50℃	-25℃ ~ +50℃
规格尺寸(不含预埋盒)/Dimension(without installation box)	100x200x55mm	100x200x55mm
连接线/Cable Interconnect	电源线2x1.0mm² 橡胶线; 信号线4x0.3mm² 橡胶线	Power cable: 2x1.0mm² rubber cable; Signal cable: 4x0.3mm² rubber cable
控制方式/Control	ON/OFF、DMX512	ON/OFF, DMX512
防护等级/Ingress Protection	IP67	IP67
光通量/Luminous Flux	72.8lm	72.8lm
辉度级别/Contrast Level	8 bit(DMX512)	8 bit(DMX512)
亮度级别/Brightness Level	256	256
电气安全等级/Classification	Ⅲ类	Ⅲ
LED驱动方式/LED Driver	恒压驱动、恒流驱动	Constant Current Driver, Constant Voltage Driver
工作环境/Working Environment	室内、室外	Outdoor, Indoor

LED 条形发光砖
LED Rectangular Brick


Model: SL308.361000




尺寸图/Size
单位: mm



配光曲线图/Light distribution curve

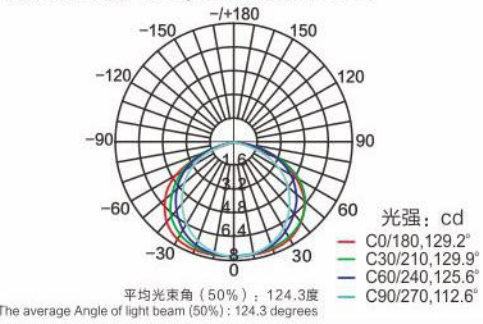

LED类型/LED Type	科锐 欧司朗 流明 日亚 等	Cree, Osram, Lumileds, Nichia etc.
系统功率/Power Rating	8W	8W
LED寿命/Life Span	≥5万小时	≥50000 hours
LED颜色/LED Color	冷白、中性白、暖白、RGB变色	White, R, G, B, RGB
光束角/Beam Angel	>100°	>100°
工作电压/Input Voltage	24VDC	24VDC
外壳材质/Material(Housing)	不锈钢	Stainless Steel
玻璃材质/Glass Material	钢化玻璃	Tempered Glass
环境温度范围/Working Temperature	-25℃ ~ +50℃	-25℃ ~ +50℃
规格尺寸(不含预埋盒)/Dimension(without installation box)	36x1000x55mm	36x1000x55mm
连接线/Cable Interconnect	电源线2x1.0mm² 橡胶线; 信号线4x0.3mm² 橡胶线	Power cable: 2x1.0mm² rubber cable; Signal cable: 4x0.3mm² rubber cable
控制方式/Control	ON/OFF、DMX512	ON/OFF, DMX512
防护等级/Ingress Protection	IP67	IP67
光通量/Luminous Flux	224lm	224lm
辉度级别/Contrast Level	8 bit(DMX512)	8 bit(DMX512)
亮度级别/Brightness Level	256	256
电气安全等级/Classification	Ⅲ类	Ⅲ
LED驱动方式/LED Driver	恒压驱动、恒流驱动	Constant Current Driver, Constant Voltage Driver
工作环境/Working Environment	室内、室外	Outdoor, Indoor

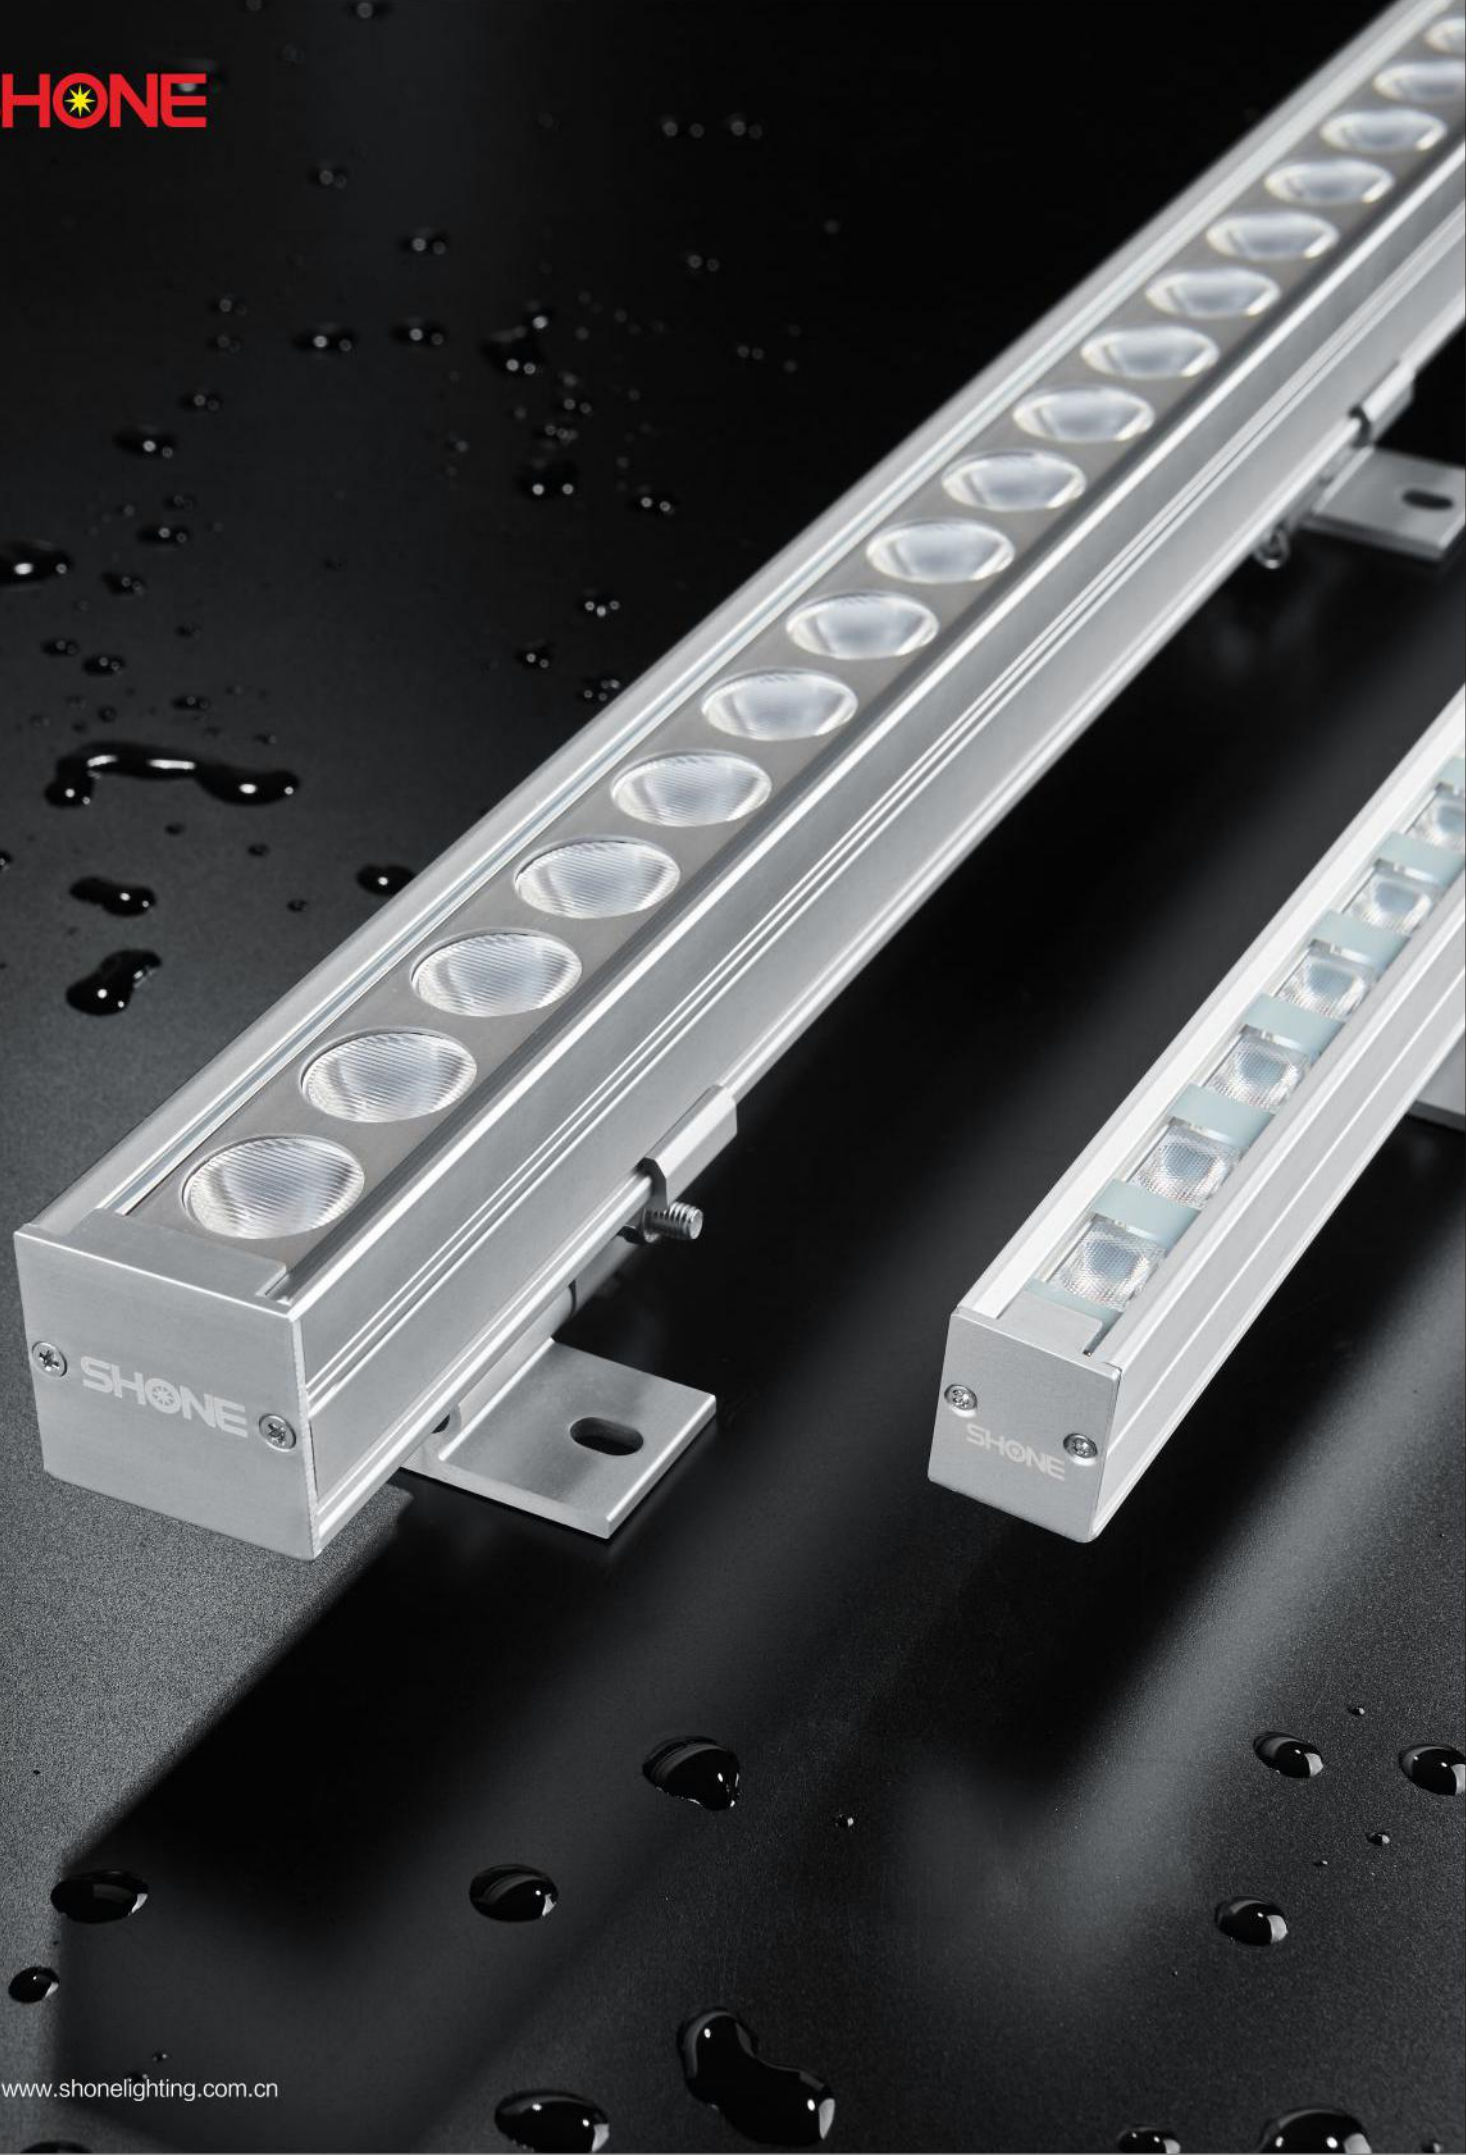

PROFESSIONAL LED OUTDOOR LINEAR LIGHT SERIES

LED户外 线型灯系列

LED 洗墙灯 LED Wall Washer

LED 轮廓灯 LED Outline Light



产品特点:

- 尺寸可定制
- 颜色可定制
- 高强度铝型材加高清晰钢化玻璃结构
- 采用可靠散热设计，灯具更稳定，寿命更长久
- 防护等级达IP65
- DC24V供电，确保供电、信号的有效传输，线路损耗低

Features:

- Size Customizable
- Color Customizable
- High-strength precision aluminum profile of high efficient thermal dissipation design with clear tempered glass diffuser and anti-glare shield.
- Rugged built, efficient and effective thermal design aluminum housing for stable operation and long service life.
- Preventive vent, waterproof connectors and rated IP65
- Easy and fast installation with stainless steel spring brackets

应用场所:

先朗线条灯的终极追求：优异控光表现下的窄和薄，为建筑增值。

- 特别适合城市景观亮化、商业地产、媒体建筑选用。
- 白天，隐藏在建筑幕墙的线条灯与建筑物融为一体。
- 晚上，线条灯发出梦幻的灯光，让建筑物美丽的夜景成为城市的景观。

Application:

The ultimate pursuit of Shone LED linear light is to increase the building value with the excel performance of the narrow and thin lighting fixture.



- Suitable for the urban landscape, commercial real estate, media building lighting.
- During the day time, the LED linear light can be blended with the building perfectly.
- At night, the dreamlike light from the LED linear light makes the building as the beautiful night view of the city.

LED 洗墙灯
LED Wall Washer

Model: SL413.3030



Available Specification: SL413.3839 / SL413.3836

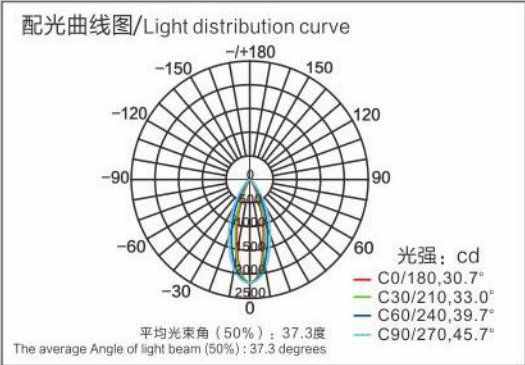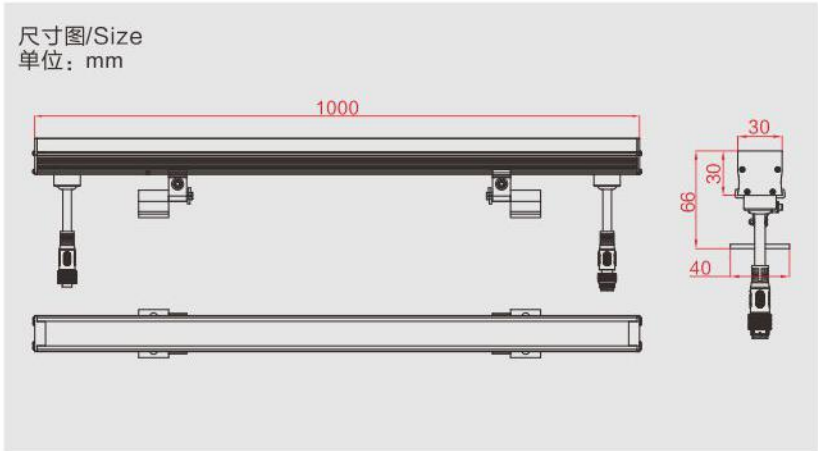

LED类型/LED Type	科锐 欧司朗 流明 日亚 等			Cree, Osram, Lumileds, Nichia etc.		
系统功率/Power Rating	24W	12W	7.2W	24W	12W	7.2W
规格尺寸(不含支架)/Dimension(without mounting bracket)	30x30x1000mm	30x30x500mm	30x30x300mm	30x30x1000mm	30x30x500mm	30x30x300mm
光通量/Luminous Flux	1320lm	660lm	396lm	1320lm	660lm	396lm
LED寿命/Life Span	≥5万小时			≥50000 hours		
LED颜色/LED Color	冷白、中性白、暖白、RGB变色			White, R, G, B, RGB		
光束角/Beam Angel	30°、45°、60°、25x45°、100°			30°, 45°, 60°, 25x45°, 100°		
工作电压/Input Voltage	24VDC			24VDC		
外壳材质/Material(Housing)	铝合金灯体, 氧化喷砂表面处理			Aluminum Body, Oxidation Sandblasting		
玻璃材质/Glass Material	钢化玻璃			Tempered Glass		
环境温度范围/Working Temperature	-25℃~+50℃			-25℃~+50℃		
连接线/Cable Interconnect	电源线2x1.0mm² 橡胶线; 信号线4x0.3mm² 橡胶线			Power cable: 2x1.0mm² rubber cable; Signal cable: 4x0.3mm² rubber cable		
控制方式/Control	ON/OFF、DMX512			ON/OFF, DMX512		
防护等级/Ingress Protection	IP65			IP65		
辉度级别/Contrast Level	16 bit(DMX512)			16 bit(DMX512)		
亮度级别/Brightness Level	256			256		
电气安全等级/Classification	Ⅲ类			Ⅲ		
LED驱动方式/LED Driver	恒压驱动、恒流驱动			Constant Current Driver, Constant Voltage Driver		
工作环境/Working Environment	室内、室外			Outdoor, Indoor		


LED 洗墙灯
LED Wall Washer
Model: SL413.3836




Available Specification: SL413.2530 / SL413.3839



尺寸图/Size
单位: mm

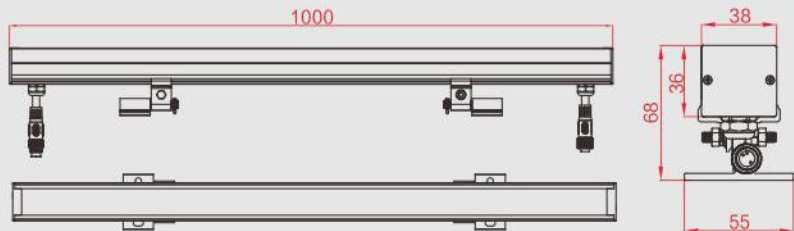

配光曲线图/Light distribution curve


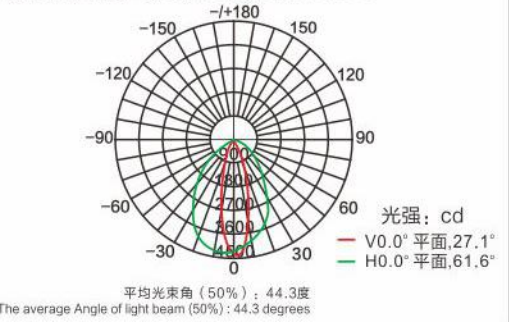


LED类型/LED Type	科锐 欧司朗 流明 日亚 等			Cree, Osram, Lumileds, Nichia etc.		
系统功率/Power Rating	35W	17.6W	12W	35W	17.6W	12W
规格尺寸(不含支架)/Dimension(without mounting bracket)	38x36x1000mm	38x36x500mm	38x36x350mm	38x36x1000mm	38x36x500mm	38x36x350mm
光通量/Luminous Flux	2800lm	1400lm	960lm	2800lm	400lm	960lm
LED寿命/Life Span	≥5万小时			≥50000 hours		
LED颜色/LED Color	冷白、中性白、暖白、RGB变色			White, R, G, B, RGB		
光束角/Beam Angel	12x12°、12x36°、30x60°			12x12°, 12x36°, 30x60°		
工作电压/Input Voltage	24VDC			24VDC		
外壳材质/Material(Housing)	铝合金灯体, 氧化喷砂表面处理			Aluminum Body, Oxidation Sandblasting		
玻璃材质/Glass Material	钢化玻璃			Tempered Glass		
环境温度范围/Working Temperature	-25℃ ~ +50℃			-25℃ ~ +50℃		
连接线/Cable Interconnect	电源线2x1.0mm² 橡胶线; 信号线4x0.3mm² 橡胶线			Power cable: 2x1.0mm² rubber cable; Signal cable: 4x0.3mm² rubber cable		
控制方式/Control	ON/OFF、DMX512			ON/OFF, DMX512		
防护等级/Ingress Protection	IP65			IP65		
辉度级别/Contrast Level	16 bit(DMX512)			16 bit(DMX512)		
亮度级别/Brightness Level	256			256		
电气安全等级/Classification	Ⅲ类			Ⅲ		
LED驱动方式/LED Driver	恒压驱动、恒流驱动			Constant Current Driver, Constant Voltage Driver		
工作环境/Working Environment	室内、室外			Outdoor, Indoor		

LED 轮廓灯
LED Outline Light
Model: SL413.1525



Available Specification: SL413.1935

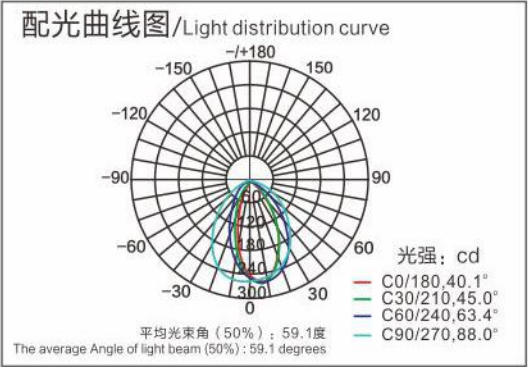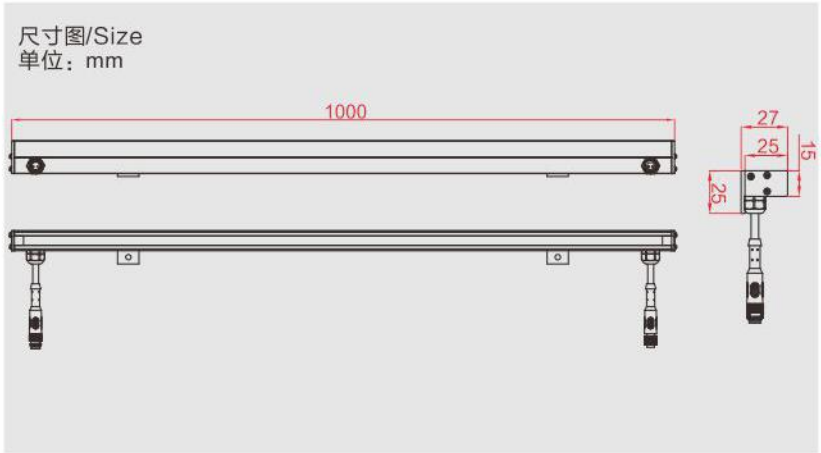

LED类型/LED Type	科锐 欧司朗 流明 日亚 等			Cree, Osram, Lumileds, Nichia etc.		
系统功率/Power Rating	6W	3W	1.8W	6W	3W	1.8W
规格尺寸(不含支架)/Dimension(without mounting bracket)	15x25x1000mm	15x25x500mm	15x25x300mm	15x25x1000mm	15x25x500mm	15x25x300mm
光通量/Luminous Flux	270lm	135lm	82lm	270lm	135lm	82lm
LED寿命/Life Span	≥5万小时			≥50000 hours		
LED颜色/LED Color	冷白、中性白、暖白、RGB变色			White, R, G, B, RGB		
光束角/Beam Angel	>100°			>100°		
工作电压/Input Voltage	24VDC			24VDC		
外壳材质/Material(Housing)	铝合金灯体, 氧化喷砂表面处理			Aluminum Body, Oxidation Sandblasting		
玻璃材质/Glass Material	亚克力板			PMMA		
环境温度范围/Working Temperature	-25℃ ~ +50℃			-25℃ ~ +50℃		
连接线/Cable Interconnect	电源线2x0.5mm² 橡胶线			Power cable: 2x0.5mm² rubber cable		
控制方式/Control	ON/OFF			ON/OFF		
防护等级/Ingress Protection	IP65			IP65		
辉度级别/Contrast Level	8 bit			8 bit(DMX512)		
亮度级别/Brightness Level	256			256		
电气安全等级/Classification	Ⅲ类			Ⅲ		
LED驱动方式/LED Driver	恒压驱动、恒流驱动			Constant Current Driver, Constant Voltage Driver		
工作环境/Working Environment	室内、室外			Outdoor, Indoor		


LED 轮廓灯
LED Outline Light
Model: SL413.2227




Available Specification: SL413.2435



尺寸图/Size
单位: mm

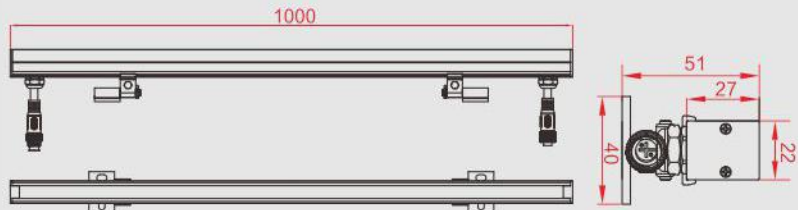

配光曲线图/Light distribution curve

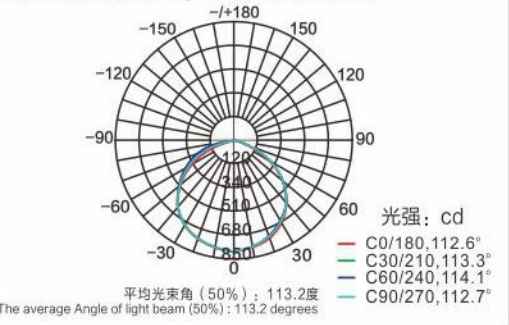


LED类型/LED Type	科锐 欧司朗 流明 日亚 等			Cree, Osram, Lumileds, Nichia etc.		
系统功率/Power Rating	21W	11W	7W	21W	11W	7W
规格尺寸(不含支架)/Dimension(without mounting bracket)	22x27x1000mm	22x27x500mm	22x27x350mm	22x27x1000mm	22x27x500mm	22x27x350mm
光通量/Luminous Flux	1500lm	750lm	500lm	1500lm	750lm	500lm
LED寿命/Life Span	≥5万小时			≥50000 hours		
LED颜色/LED Color	冷白、中性白、暖白、RGB变色			White, R, G, B, RGB		
光束角/Beam Angel	>100°			>100°		
工作电压/Input Voltage	24VDC			24VDC		
外壳材质/Material(Housing)	铝合金灯体, 氧化喷砂表面处理			Aluminum Body, Oxidation Sandblasting		
玻璃材质/Glass Material	钢化玻璃			Tempered Glass		
环境温度范围/Working Temperature	-25℃ ~ +50℃			-25℃ ~ +50℃		
连接线/Cable Interconnect	电源线2x1.0mm² 橡胶线; 信号线4x0.3mm² 橡胶线			Power cable: 2x1.0mm² rubber cable; Signal cable: 4x0.3mm² rubber cable		
控制方式/Control	ON/OFF、DMX512			ON/OFF, DMX512		
防护等级/Ingress Protection	IP65			IP65		
辉度级别/Contrast Level	8 bit/16 bit(DMX512)			8 bit/16 bit(DMX512)		
亮度级别/Brightness Level	256			256		
电气安全等级/Classification	Ⅲ类			Ⅲ		
LED驱动方式/LED Driver	恒压驱动、恒流驱动			Constant Current Driver, Constant Voltage Driver		
工作环境/Working Environment	室内、室外			Outdoor, Indoor		


LED 轮廓灯
LED Outline Light
Model: SL413.2023



尺寸图/Size
单位: mm

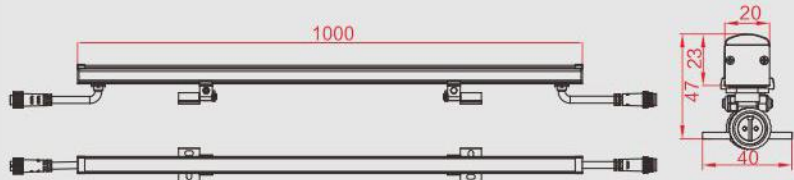

配光曲线图/Light distribution curve

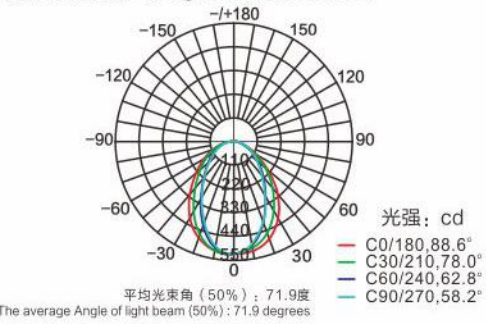

LED类型/LED Type	科锐 欧司朗 流明 日亚 等			Cree, Osram, Lumileds, Nichia etc.		
系统功率/Power Rating	5.5W	7.5W	15W	5.5W	7.5W	15W
规格尺寸(不含支架)/Dimension(without mounting bracket)	20x23x350mm	20x23x500mm	20x23x1000mm	20x23x350mm	20x23x500mm	20x23x1000mm
光通量/Luminous Flux	420lm	562.5lm	1125lm	420lm	562.5lm	1125lm
LED寿命/Life Span	≥5万小时			≥50000 hours		
LED颜色/LED Color	冷白、中性白、暖白			White		
光束角/Beam Angel	>110°			>110°		
工作电压/Input Voltage	24 VDC			24VDC		
外壳材质/Material(Housing)	铝合金灯体			Aluminum Body		
玻璃材质/Glass Material	半透明PC罩			Semitransparent PC Cover		
环境温度范围/Working Temperature	-25℃ ~ +50℃			-25℃ ~ +50℃		
连接线/Cable Interconnect	电源线2x1.0mm² 橡胶线			Power cable: 2x1.0mm² rubber cable		
控制方式/Control	ON/OFF			ON/OFF		
防护等级/Ingress Protection	IP65			IP65		
辉度级别/Contrast Level	-			-		
亮度级别/Brightness Level	-			-		
电气安全等级/Classification	Ⅲ类			Ⅲ		
LED驱动方式/LED Driver	恒压驱动、恒流驱动			Constant Current Driver, Constant Voltage Driver		
工作环境/Working Environment	室内 / 室外			Outdoor, Indoor		

PROFESSIONAL
LED INDOOR LINEAR LIGHT
LED 室内 线型灯系列
LED T5

Model: SL502.2336.7



性能特点:

- 高亮度LED
- 光色亮丽，外观精美。
- LED显色性≥80
- 经济高效，节能，易于安装
- 适合室内装饰照明及商用照明使用


Features:

- High brightness LED video pixel line lights
- Light color and beautiful appearance.
- LED color rendering ≥80
- Cost-effective, energy-saving and easy to install
- Suitable for interior lighting and commercial lighting

尺寸图/Size
单位: mm



配光曲线图/Light distribution curve

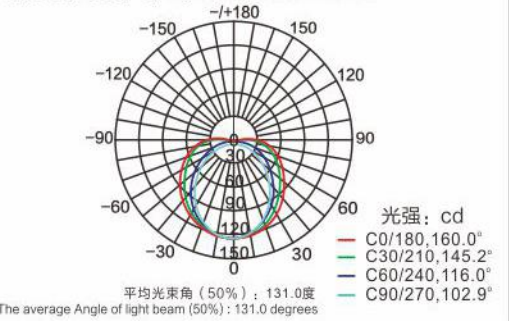

LED类型/LED Type	科锐 欧司朗 流明 日亚 等					Cree, Osram, Lumileds, Nichia etc.				
系统功率/Power Rating	25W	20W	13W	10W	6W	25W	20W	13W	10W	6W
规格尺寸/Dimension	36.7x23x1474mm		36.7x23x1173mm	36.7x23x874mm		36.7x23x1474mm	36.7x23x1173mm		36.7x23x874mm	
	36.7x23x574mm		36.7x23x314mm			36.7x23x574mm	36.7x23x314mm			
光通量/Luminous Flux	2000lm	1600lm	1040lm	800lm	480lm	2000lm	1600lm	1040lm	800lm	480lm
LED寿命/Life Span	≥5万小时					≥50000 hours				
LED颜色/LED Color	冷白、中性白、暖白					White				
光束角/Beam Angel	>100°					>100°				
工作电压/Input Voltage	100-277VAC					100-277VAC				
外壳材质/Material(Housing)	铝合金灯体					Aluminum Body				
玻璃材质/Glass Material	乳白PC罩					PC mask				
环境温度范围/Working Temperature	-25℃ ~ +50℃					-25℃ ~ +50℃				
连接方式/Cable Interconnect	电源插头供电，可通过中接头串接使用。					Lamp Docking				
控制方式/Control	ON/OFF					ON/OFF				
防护等级/Ingress Protection	IP20					IP20				
电气安全等级/Classification	I 类					I				
LED驱动方式/LED Driver	恒流驱动					Constant Current Driver				
工作环境/Working Environment	室内					Indoor				

PROFESSIONAL
LED INDOOR LINEAR LIGHT
LED 室内 线型灯系列
Slim



Model: SL413.1816.5



- 性能特点:

 - 高亮度LED视频像素线条灯
 - 光色亮丽，外观精美。
 - LED显色性≥80
 - 经济高效，节能，易于安装
 - 适合室内装饰照明及商用照明使用
- Features:

 - High brightness LED video pixel line lights
 - Light color and beautiful appearance.
 - LED color rendering ≥80
 - Cost-effective, energy-saving and easy to install
 - Suitable for interior lighting and commercial lighting

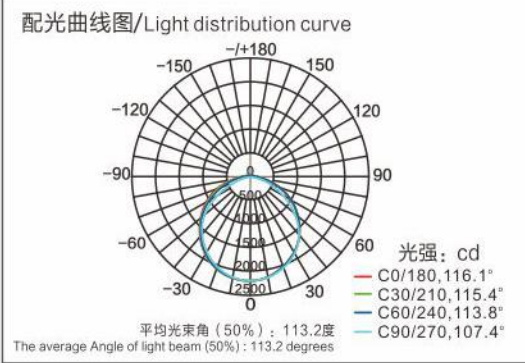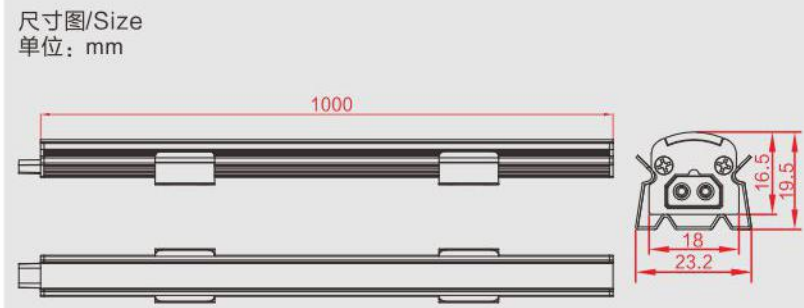

LED类型/LED Type	科锐 欧司朗 流明 日亚 等			Cree, Osram, Lumileds, Nichia etc.		
系统功率/Power Rating	15W	7.5W	5W	15W	7.5W	5W
规格尺寸(不含支架)/Dimension(without mounting bracket)	18x16.5x1000mm	18x16.5x500mm	18x16.5x350mm	18x16.5x1000mm	18x16.5x500mm	18x16.5x350mm
光通量/Luminous Flux	900lm	450lm	300lm	900lm	450lm	300lm
LED寿命/Life Span	≥5万小时			≥50000 hours		
LED颜色/LED Color	冷白、中性白、暖白			White		
光束角/Beam Angel	>100°			>100°		
工作电压/Input Voltage	24VDC			24VDC		
外壳材质/Material(Housing)	铝合金灯体，氧化喷砂表面处理			Aluminum Body, Oxidation Sandblasting		
玻璃材质/Glass Material	抗UV，PC面罩			Anti-UV, PC mask		
环境温度范围/Working Temperature	-25℃ ~ +50℃			-25℃ ~ +50℃		
连接线/Cable Interconnect	电源线2x1.0mm² 橡胶线			Power cable: 2x1.0mm² rubber cable		
控制方式/Control	ON/OFF			ON/OFF		
防护等级/Ingress Protection	IP20			IP20		
辉度级别/Contrast Level	-			-		
亮度级别/Brightness Level	-			-		
电气安全等级/Classification	Ⅲ类			Ⅲ		
LED驱动方式/LED Driver	恒压驱动			Constant Voltage Driver		
工作环境/Working Environment	室内			Indoor		

PROFESSIONAL
LED FLOODLIGHT SERIES
LED户外 投光灯系列

Model: SL313.6990





Available Specification: SL313.11667
SL313.260140
SL313.330140

性能特点:

- 高强度铝型材加高清晰钢化玻璃结构
- 采用可靠散热设计, 灯具更稳定, 寿命更长久
- 灯具颜色可根据客户要求定制, 防护等级达IP65
- 适用于城市景观亮化、商业地产、媒体建筑
- DC24V供电, 确保馈电、信号的有效传输, 线路损耗低

Features:

- High-strength precision aluminum profile of high efficient thermal dissipation design with clear tempered glass diffuser and anti-glare shield.
- Rugged built, efficient and effective thermal design aluminum housing for stable operation and long service life.
- Customizable fixture color and length.
- Preventive vent, waterproof connectors and rated IP65
- Easy and fast installation with stainless steel spring brackets
- For urban landscape lighting, commercial real estate, media architecture

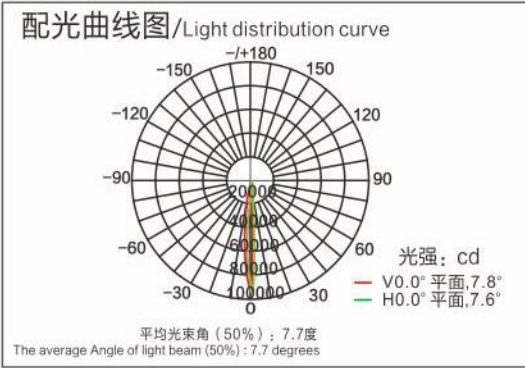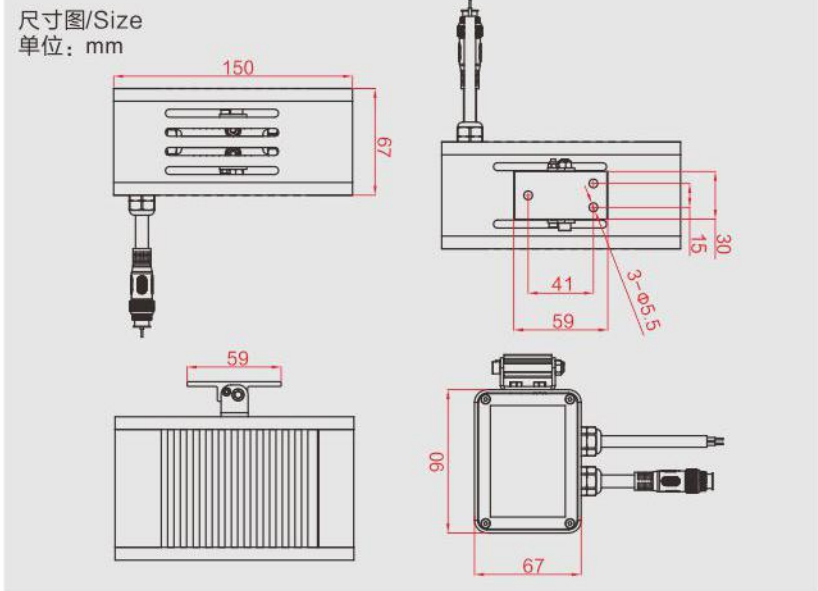

LED类型/LED Type	科锐 欧司朗 流明 日亚 等				Cree, Osram, Lumileds, Nichia etc.			
系统功率/Power Rating	70W	50W	20W	15W	70W	50W	20W	15W
规格尺寸/Dimension	330x140x150mm		260x140x150mm		330x140x150mm		260x140x150mm	
	116x67x150mm		69x90x150mm		116x67x150mm		69x90x150mm	
光通量/Luminous Flux	3443lm	2655lm	827lm	728lm	3443lm	2655lm	827lm	728lm
LED寿命/Life Span	≥5万小时				≥50000 hours			
LED颜色/LED Color	冷白、中性白、暖白、RGB变色				White, R, G, B, RGB			
光束角/Beam Angel	5°				5°			
工作电压/Input Voltage	24VDC				24VDC			
外壳材质/Material(Housing)	铝合金灯体, 氧化喷砂表面处理				Aluminum Body, Oxidation Sandblasting			
玻璃材质/Glass Material	钢化玻璃				Tempered Glass			
环境温度范围/Working Temperature	-25℃ ~ +50℃				-25℃ ~ +50℃			
连接线/Cable Interconnect	电源线2x1.0mm²橡胶线; 信号线4x0.3mm²橡胶线				Power cable: 2x1.0mm²rubber cable; Signal cable: 4x0.3mm²rubber cable			
控制方式/Control	ON/OFF, DMX512				ON/OFF, DMX512			
防护等级/Ingress Protection	IP65				IP65			
辉度级别/Contrast Level	16 bit(DMX512)				16 bit(DMX512)			
亮度级别/Brightness Level	256				256			
电气安全等级/Classification	Ⅲ类				Ⅲ			
LED驱动方式/LED Driver	恒流驱动				Constant Current Driver			
工作环境/Working Environment	室内、室外				Outdoor, Indoor			

PROFESSIONAL
FREEZER LINEAR LIGHT
LED 冷柜灯

Model: SL319.1212





Available Specification: SL319.14.47.5

- 性能特点:

 - 高亮度LED冷柜灯条
 - 光色亮丽
 - LED显色性≥80
 - 经济高效, 节能, 易于安装
 - 适合室内装饰照明及商用照明使用
- Features:

 - High brightness LED freezer light.
 - Light color and beautiful appearance.
 - LED color rendering ≥80
 - Cost-effective, energy-saving and easy to install
 - Suitable for interior lighting and commercial lighting

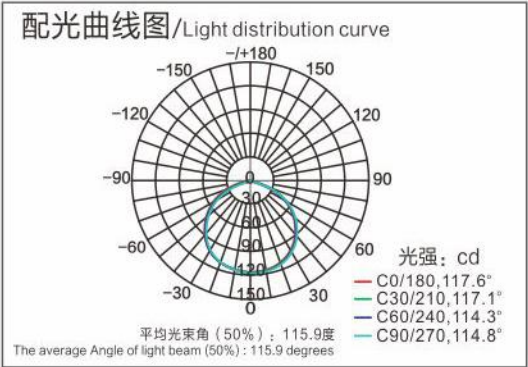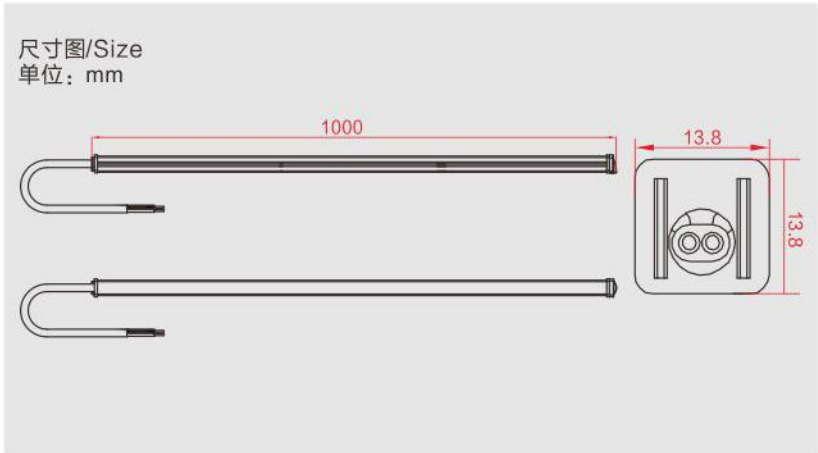

LED类型/LED Type	科锐 欧司朗 流明 日亚 等			Cree, Osram, Lumileds, Nichia etc.		
系统功率/Power Rating	12W	7W	4W	12W	7W	4W
规格尺寸/Dimension	12x12x1000mm	12x12x600mm	12x12x300mm	12x12x1000mm	12x12x600mm	12x12x300mm
光通量/Luminous Flux	1000lm	583lm	333lm	1000lm	583lm	333lm
LED寿命/Life Span	≥5万小时			≥50000 hours		
LED颜色/LED Color	冷白、中性白、暖白			White		
光束角/Beam Angel	>100°			>100°		
工作电压/Input Voltage	220VAC/24VDC			220VAC/24VDC		
外壳材质/Material(Housing)	乳白/半透明PC罩			milk-white/semitransparentt PC cover		
连接线/Cable Interconnect	电源线2x0.5mm			Power Cable: 2x0.5mm		
控制方式/Control	ON/OFF			ON/OFF		
防护等级/Ingress Protection	IP20			IP20		
电气安全等级/Classification	Ⅲ类			Ⅲ		
LED驱动方式/LED Driver	恒压驱动			Constant Voltage Driver		
工作环境/Working Environment	冷柜			Freezer		

PROFESSIONAL
ADVERTISING LINEAR LIGHT
LED 广告灯条



Model: SL300.136.1










- 性能特点:

 - 高亮度LED灯箱灯条
 - 光色亮丽
 - LED显色性≥80
 - 经济高效, 节能, 易于安装
 - 适合室内装饰照明及商用照明使用
- Features:

 - High brightness LED light box light.
 - Light color and beautiful appearance.
 - LED color rendering ≥80
 - Cost-effective, energy-saving and easy to install
 - Suitable for interior lighting and commercial lighting

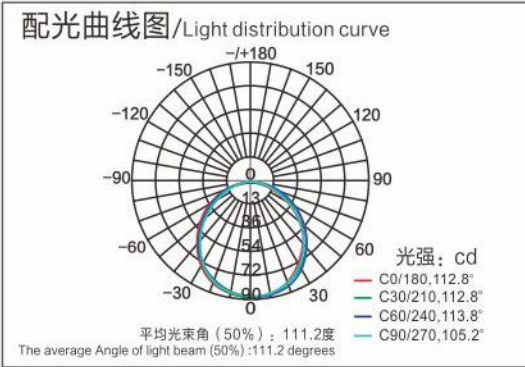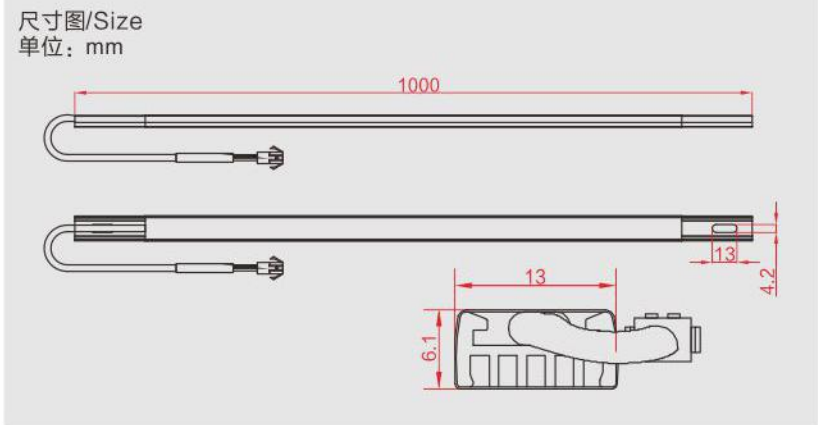

LED类型/LED Type	科锐 欧司朗 流明 日亚 等		Cree, Osram, Lumileds, Nichia etc.	
系统功率/Power Rating	2.6W	2.2W	2.6W	2.2W
规格尺寸/Dimension(without mounting bracket)	13x6.1x1444mm	13x6.1x1220mm	13x6.1x1444mm	13x6.1x1220mm
光通量/Luminous Flux	254lm	248lm	254lm	248lm
LED寿命/Life Span	≥5万小时		≥50000 hours	
LED颜色/LED Color	冷白、中性白、暖白		White	
光束角/Beam Angel	>100°		>100°	
工作电压/Input Voltage	24VDC		24VDC	
外壳材质/Material(Housing)	塑料		Plastic	
环境温度范围/Working Temperature	-25℃ ~ +50℃		-25℃ ~ +50℃	
连接线/Cable Interconnect	电源线2x0.5mm		Power cable: 2x0.5mm	
控制方式/Control Dimension(without mounting bracket)	ON/OFF		ON/OFF	
防护等级/Ingress Protection	IP20		IP20	
电气安全等级/Classification	Ⅲ类		Ⅲ	
LED驱动方式/LED Driver	恒流驱动		Constant Current Driver	
工作环境/Working Environment	室内		Indoor	

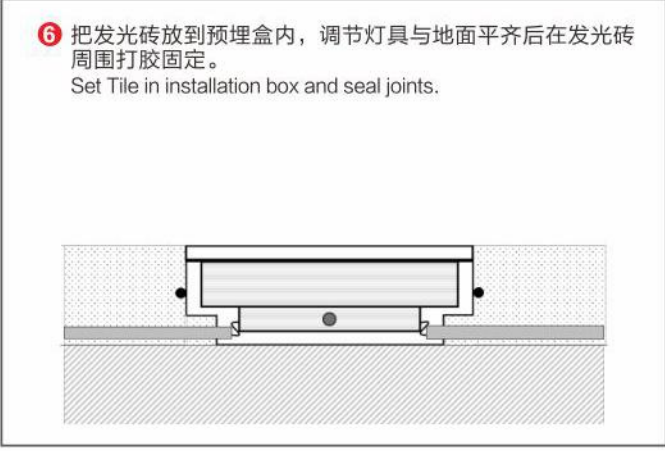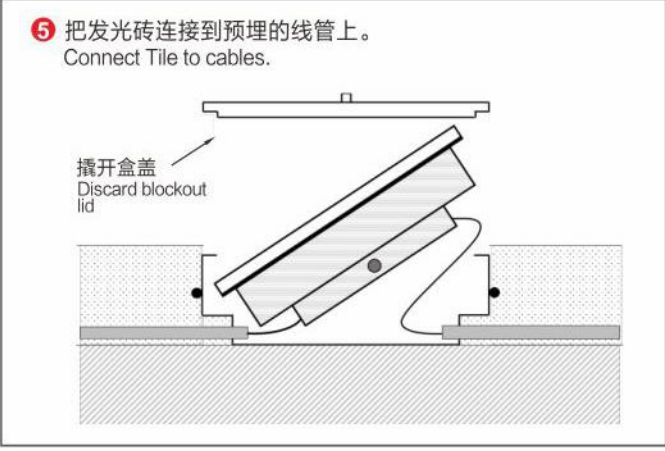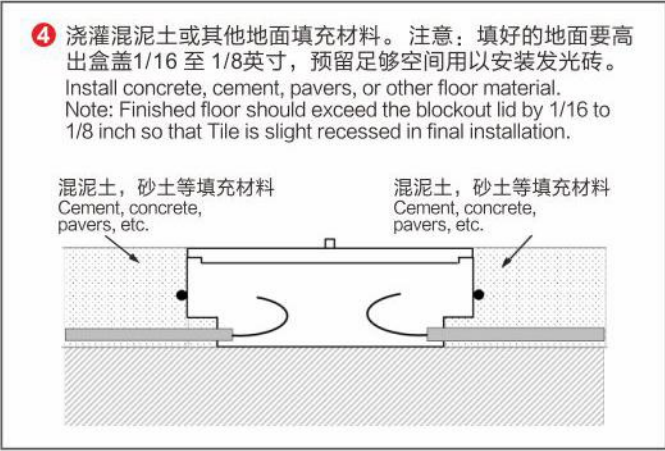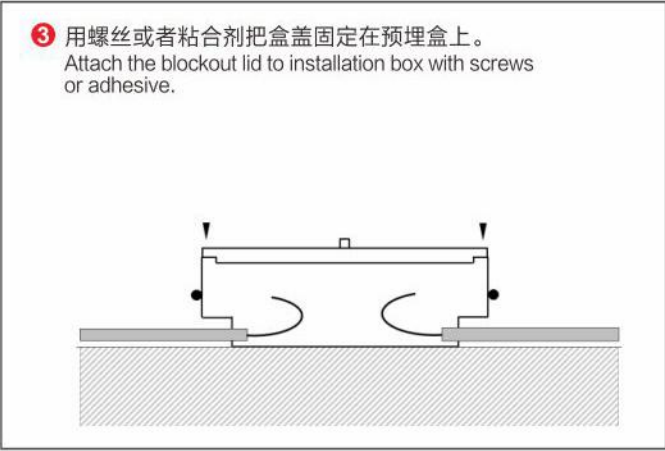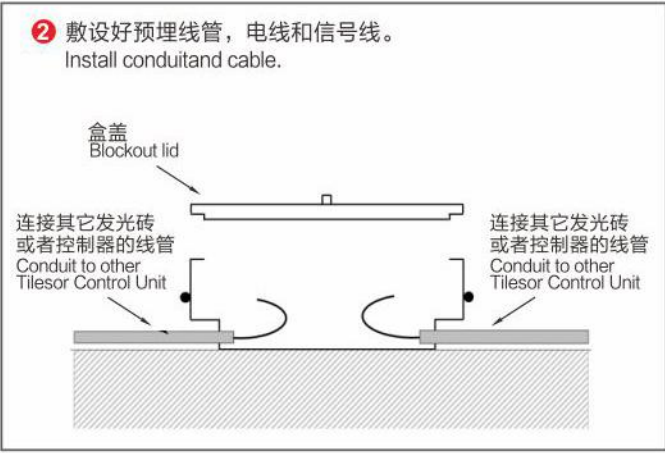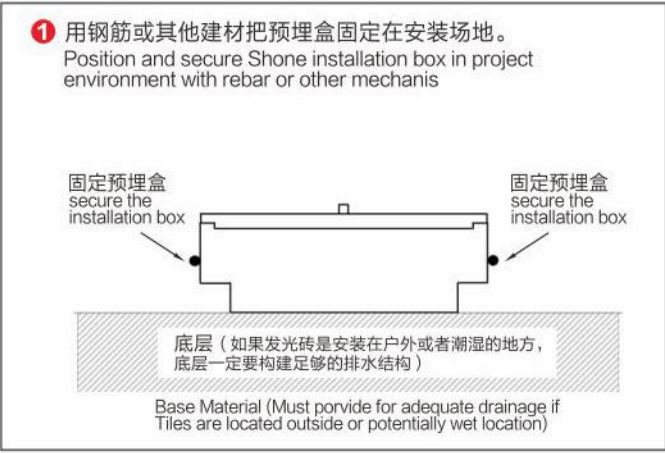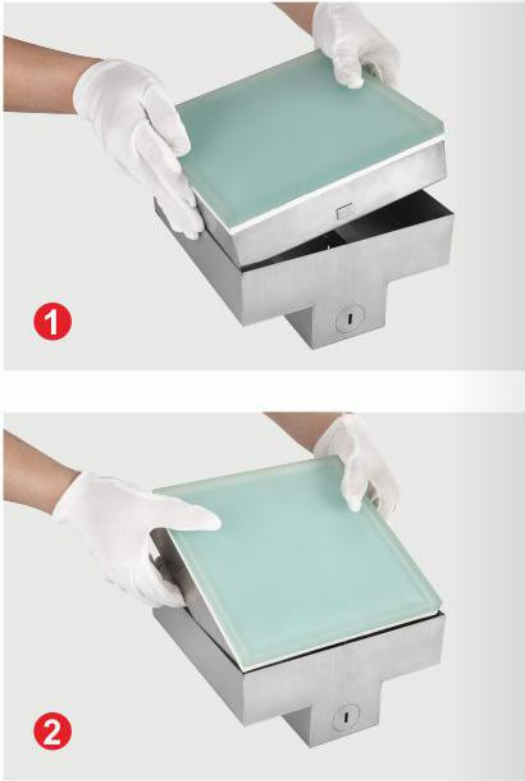

- 1 地砖面需与完成面同一水平线, 以免行人被地砖边缘绊倒。可借助预埋盒上的木质抬板表面抬整与完成面的同一水平高度。
- 2 在底部构筑基础和排水结构, 以便在浇灌水泥过程起到固定或者支撑预埋盒的作用。
- 3 在预埋盒抬板表面覆盖保护膜 (或纸张), 以便水泥浇灌后能轻易挪动抬板。
- 4 在地砖完成最后安装的过程中, 请在地砖预埋盒位置粘黏上硬质的金属板, 以便最大的保障现场人员的安全。

- 5 LED地砖是作为行人交通、临时交通等某种照明媒介和某种因素而建的。无论如何, 关注地砖的使用是可以理解例如, 地砖的边缘被扫雪机或铁锹撞击, 很可能对地砖发生损伤。如盐碱、化雪剂或化学剂的使用也能对地砖造成损害。
- 6 请已密封完成和未完成复位的地砖记录下来, 意思就是如有一个灯具不亮, 全部灯具必须重新复位。接着如有必要, 需听从先朗为重置的地砖提供一个合理方法的劝告。
- 7 在灯具制造过程中偶尔会在已界定报价的尺寸和其他的性能上发生一些非常轻微的变动, 如透镜或都者LED颜色, 如对已到货工地现场的、任何有关预埋盒、功率或者组件的问题请联系先朗各地服务中心或项目团队。



天津团泊光合谷温泉酒店
Guanghegu Hot Spring Holiday Hotel, Tianjin



山东青岛凯德
Qingdao CapitaLand Mall, Shandong



四川航空广场SAC
Sichuan Airlines Center, Sichuan



上海外滩国际金融服务中心
The Bund Finance Center, Shanghai



广州富力丽思卡尔顿酒店
The Ritz-Carlton Restaurant, Guangzhou



重庆环球金融中心
Chongqing World Financial Centre





广州利通广场
Leatop Plaza, Guangzhou




广州中信大厦
CITIC Plaza, Guangzhou



广州太古汇
TaiKoo Hui, I Guangzhou




深圳东海国际中心
The East Pacific Center, Shenzhen

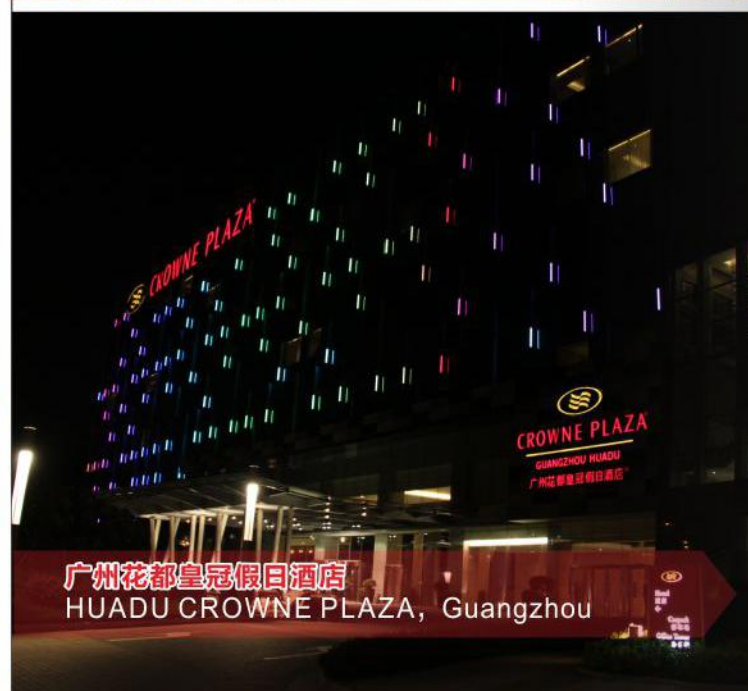

广州花都皇冠假日酒店
HUADU CROWNE PLAZA, Guangzhou



安徽九华山大愿文化园
The Great Vows Buddhism Park, Anhui

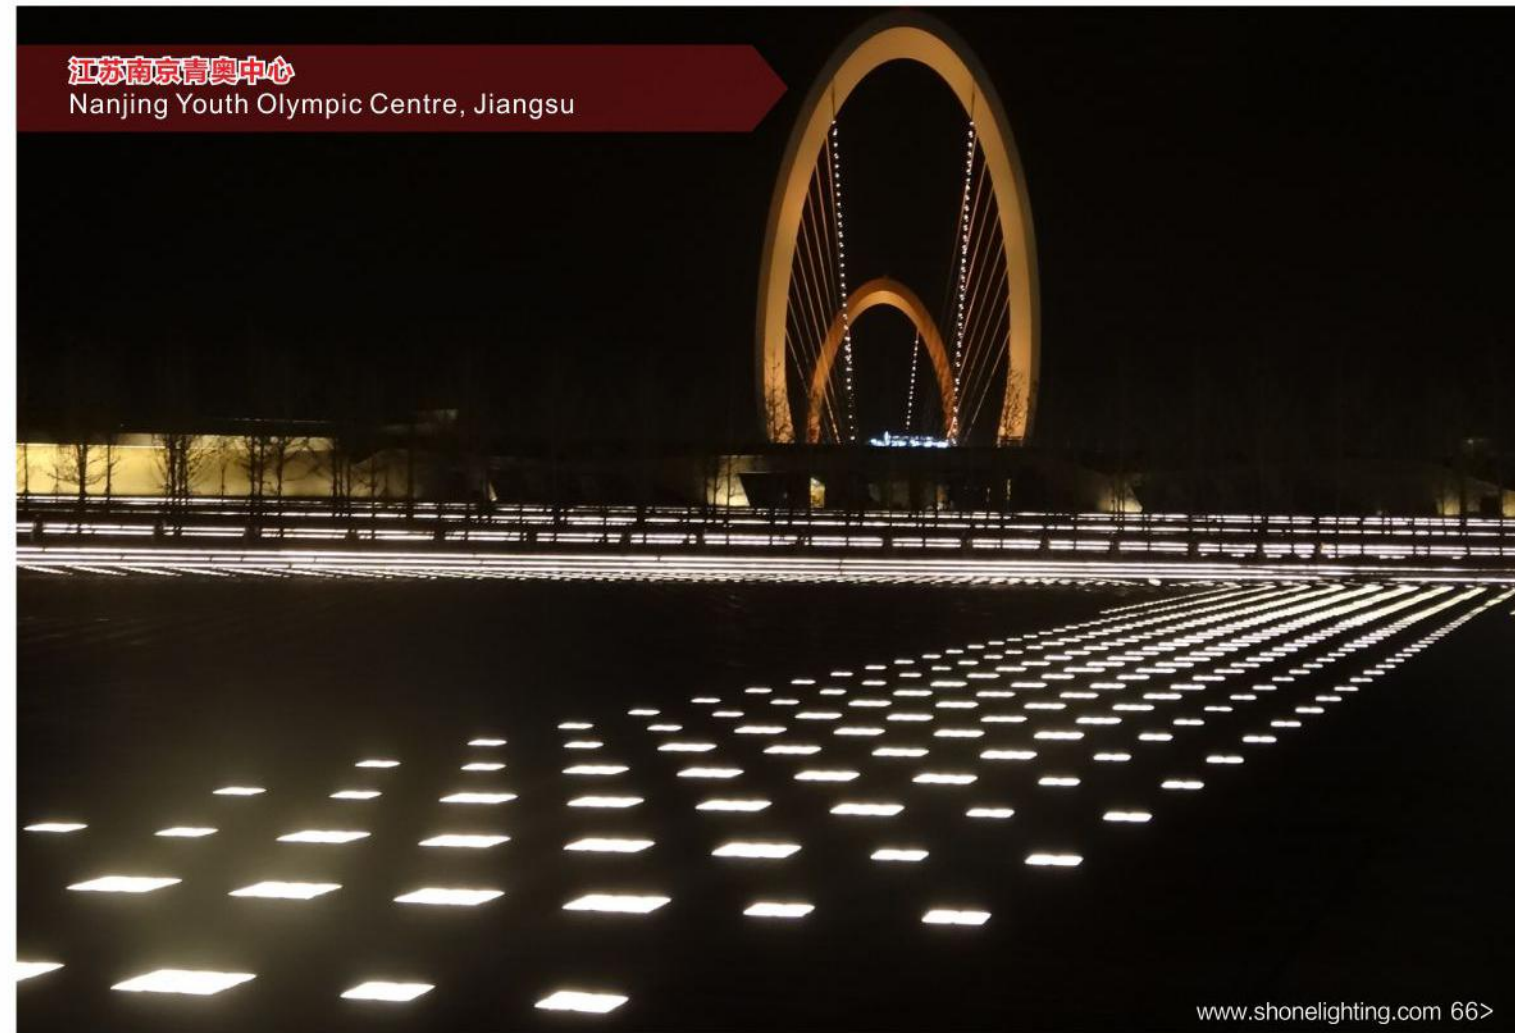


江苏南京青奥中心
Nanjing Youth Olympic Centre, Jiangsu



贵州贵阳财神街
Guiyang Fortune Street, Guizhou



广州花城广场
Flower City Square, Guangzhou

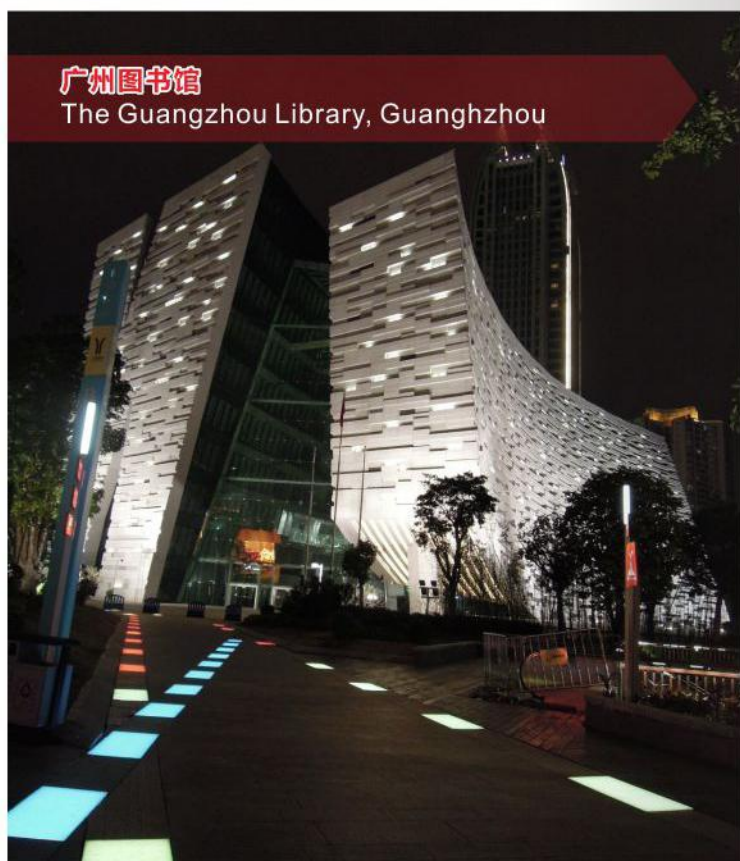

广州图书馆
The Guangzhou Library, Guangzhou



云南玉溪聂耳文化广场
Nie Er Cultural Square, Yuxi, Yunnan



湘西武陵山苗族文化广场
Miao Encouraged Square, Wuling Mountain, Xiangxi



江苏常州红梅公园
Changzhou Hongmei Park, Jiangsu



河南洛阳龙门石窟
Luoyang Longmen Grottoes, Henan



广州天河体育中心
Tianhe Sports Center, Guangzhou



美国密苏里市私人住宅
Private Residence, MO, USA



工程案例 | SHONE
Project Cases



湖北洪山广场
Hongshan Square, Hubei



江苏常州紫荆公园
Changzhou Bauhinia Park, Jiangsu



美国加利福尼亚州好莱坞 夕阳千禧馆
The SUNSET, Hollywood, CA, USA



吉林松鼠驿站
Squirrel Square, Jilin



江苏镇江金山佛教广场
Jinshan Park Buddhism Square, Jiangsu



青岛五四青年广场
May Fourth Square, Qingdao






美国内化达州拉斯维加斯 红色寿司馆
Red Sushi, Las Vegas, NV, USA



美国加利福尼亚州三藩市 160斯比尔街
160 Spear Street, San Francisco, CA, USA

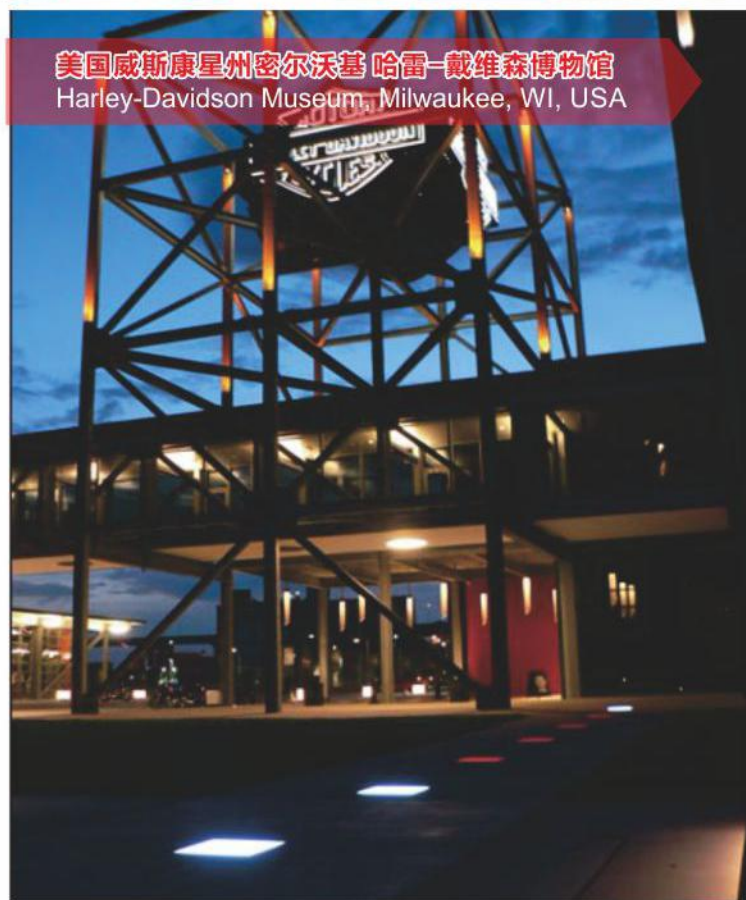

美国威斯康星州密尔沃基 哈雷-戴维森博物馆
Harley-Davidson Museum, Milwaukee, WI, USA



美国堪萨斯州来文沃斯堡 布莱德雷学校
Bradley Elementary School, Fort Leavenworth, KS, USA



美国佛罗里达州奥兰多 迪士尼
Walt Disney World, Orlando, FL, USA



美国纽约 美国运动博物馆
Sports Museum of America, New York, NY, USA



美国明尼苏达州圣保罗官兵纪念馆
Peace Officers Memorial, St. Paul, MN, USA